


Creating videos from **GeoDict** simulation results

User Guide

GeoDict release 2024

Published: November 17, 2023

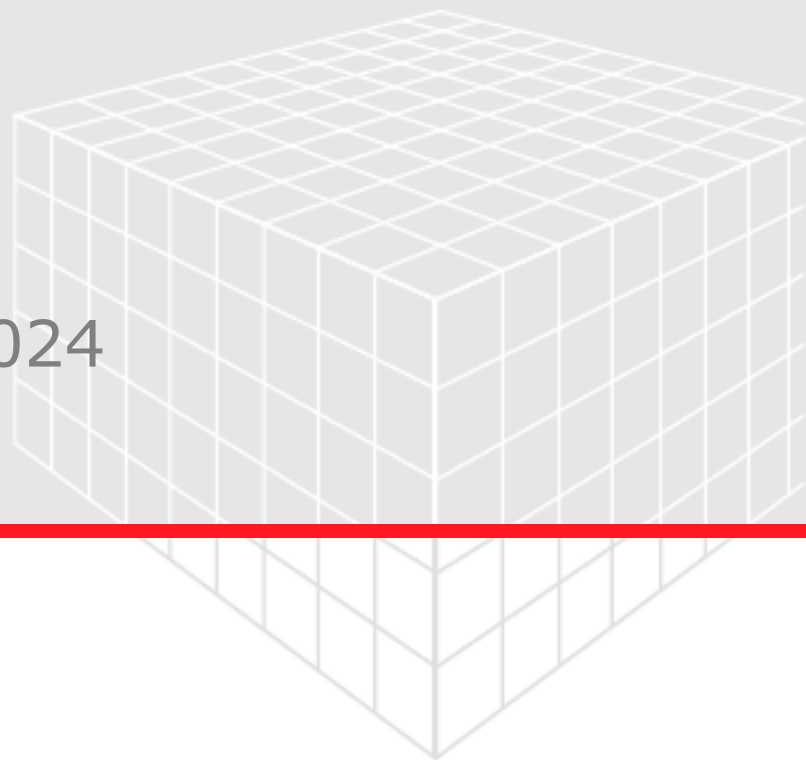

GEODICT

<https://doi.org/10.30423/userguide.geodict>

© Math2Market GmbH 2024

Citation:

Janine Hilden, Barbara Planas. GeoDict 2024 User Guide. Creating videos from GeoDict simulation results handbook. Math2Market GmbH, Germany, doi.org/10.30423/userguide.geodict

All rights reserved. It is not permitted to reproduce the book or parts thereof in any form by photocopy, microfilm or other methods or to transfer it into a language suitable for machines, in particular data processing systems, without the express permission of the publisher. The same applies to the right of public reproduction.

The handbooks in the User Guide series of Math2Market GmbH can be obtained from:

Math2Market GmbH
Richard-Wagner-Strasse 1
67655 Kaiserslautern
Germany

Phone: +49 631 205 605 0
Fax: +49 631 205 605 99
Email: info@math2market.de
Web: www.math2market.de

CREATING VIDEOS FROM GEODICT SIMULATION RESULTS	1
CREATE VIDEO	2
GENERATE VIDEO	5
VIDEO PRESETS	8
FOLLOW PARTICLE PRESET	11
PARTICLE ANIMATION PRESET	14
IMPORT AS VIDEO GEOAPP	15
CREATE VIDEO FROM IMAGE STACK	16
RESULTS	17
VIDEO EDITOR	19
PROPERTIES FIELD, GRAPH FIELD, AND VALUE FIELD	21
PROPERTIES FIELD	21
GRAPH FIELD	24
VALUE FIELD	29
USING THE VIDEO EDITOR – EXAMPLES	31
HOW TO ADD A PROPERTY	31
HOW TO PULL A KEYFRAME FROM GEODICT	34

CREATING VIDEOS FROM GEODICT SIMULATION RESULTS


Videos are an excellent medium to visualize time-dependent processes, 3D scans and structure models from all sides. Moreover, scrolling through the slices in 2D in a video is a great possibility to visualize a complete structure in detail.

GeoDict provides many visualization options, offering great animations for videos from all kinds of GeoDict results.

The **Create Video** dialog offers a variety of presets that are either ready-to-use with a click or can be tailored for the user needs by defining own presets and combining the animations fitting best to the results.

Different video formats and quality options are available to save movies with the perfect settings for individual purposes.

CREATE VIDEO

If a structure or a volume field are loaded in the Visualization area of the GeoDict GUI, the **Create Video** dialog opens after selecting **File** → **Save Video as ...** from the menu bar or by clicking the icon  in the GeoDict toolbar.


In the **Create Video** dialog, the options are organized into the **3D** and **2D** tabs. The **Create Video** dialog opens automatically to the **2D** tab or the **3D** tab depending on the current view (2D or 3D) in the Visualization area. That is, the **3D** tab is active if a structure is visualized in 3D while opening the **Create Video** dialog. When switching to the **2D** tab, the visualization of the structure changes to 2D view automatically in the GeoDict GUI.



For 3D and 2D visualization, the **Create Video** dialog contains a selection of several preset animations that are used to create a video immediately after clicking the corresponding **Generate Video** button:

- **Clipping X, Clipping Y, and Clipping Z**
- **Fly-by**
- **Follow Particle**
- **Particle Animation**
- **Rotate X, Rotate Y, and Rotate Z**
- **Streamlets**
- **Back To Front, and Back To Front (all slices)**
- **Front To Back, and Front To Back (all slices)**

The preset file for each animation may be opened and edited in the **Video Editor** dialog (see page [19](#)) by clicking the **Open Video Editor** button. The preview on the left shows (approximately) how the finished video should look like.

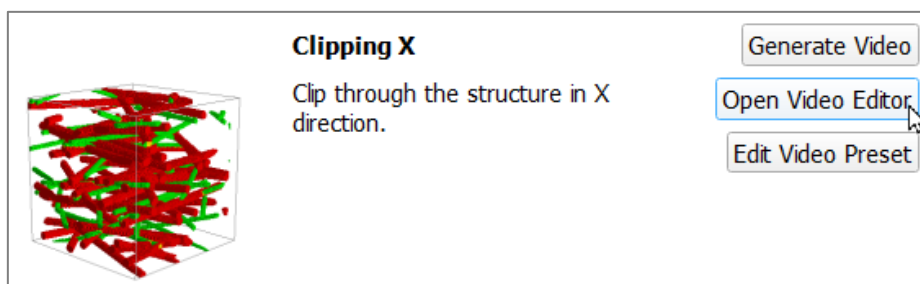


By clicking on **Edit Video Preset**, the name, the description, and the playback speed of the preview (through **frames-per-second** or **FPS**) of the preset may be modified. Also, a preset can be removed from the list by clicking **Remove**.




The following options appear when scrolling down under the 2D and the 3D tabs in the **Create Video** dialog:

- **Import as Video GeoApp** The video presets created and saved by the user are added to the **Create Video** dialog and are displayed with their own preview.
- **Create Video from Image Stack** converts a stack of single frames into a video.

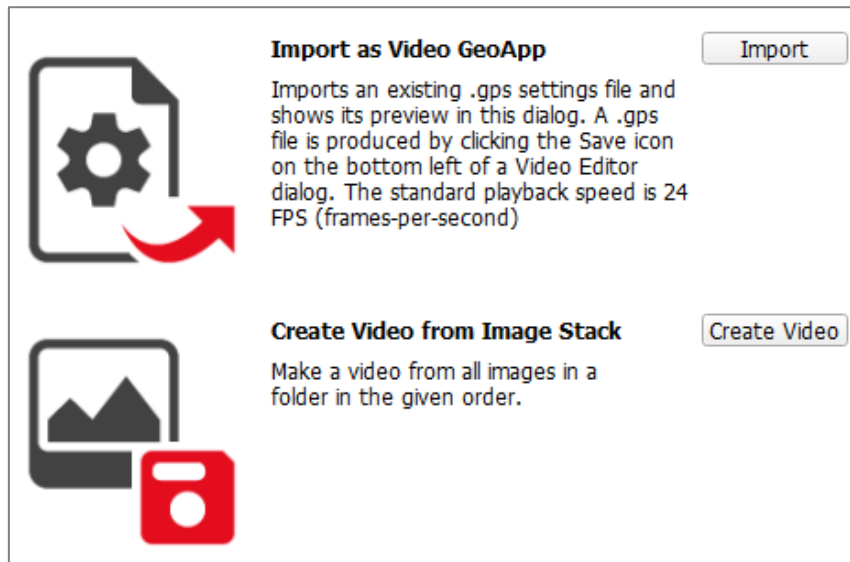

Finally, the **Video Editor** dialog can be opened containing the last edited animation by clicking **Open Current** or as a fresh, empty dialog by clicking **Open Empty**.

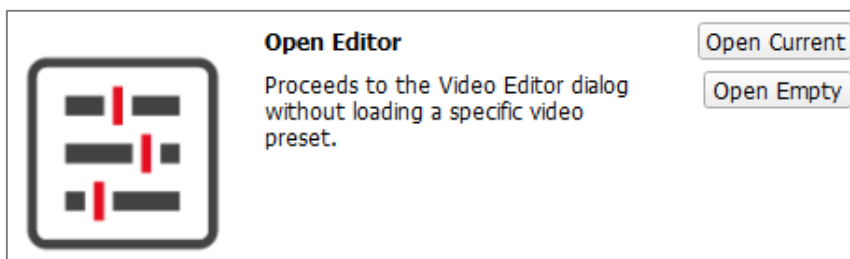

Uncheck **Play Previews** on the bottom right of the **Create Video** dialog to stop the animation of the previews that display the Video Presets.

Load the saved **Start-up Settings**, save the current **Create Video** dialog settings as **Start-up Settings** or raise the **GeoDict Main Window** (GUI) by clicking the corresponding icons on the bottom left.




Resting the mouse pointer over an icon prompts a ToolTip showing the icon's function to appear.

Clicking **Close** closes the **Create Video** dialog.

GENERATE VIDEO

Clicking **Generate Video** for any of the presets or in the **Video Editor** opens the **Export Video** dialog.

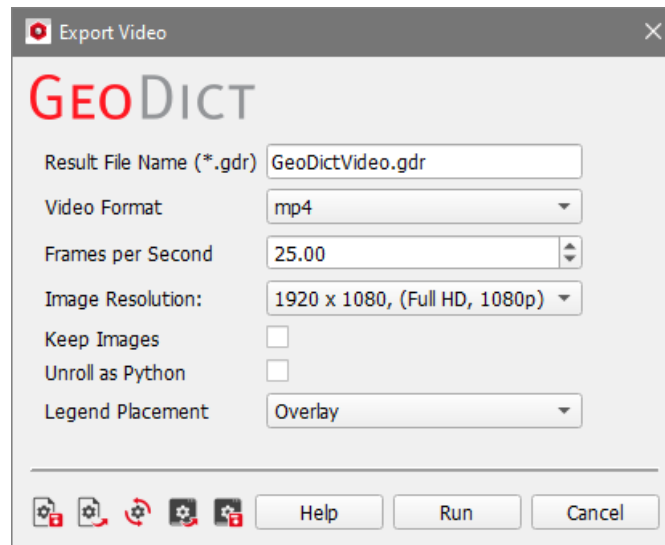


Enter a customized **Result File Name (*.gdr)** to differentiate the generated videos. The resulting GDR file will be placed inside the chosen project folder next to the generated video with the same name. Additionally, a result folder also with the same name is generated, containing the structure file (*.gdt) and the saved images.

Select the **Video Format**, **Frames per Second**, and **Image Resolution** and decide whether to **Keep Images** and **Unroll as Python** or not.


For the 2D animations, additionally the **Legend Placement** may be changed.

For **Video Format**, choose between three different video formats:




- **MP4:** Best format for any application, with the resulting video being of good image quality at a reasonable size.
- **MKV:** MKV files are multimedia container formats, which can include different and mixed audio and video formats. Since this is not an industry standard not all media players support it.
- **Images:** If this format is checked, no video is generated. Instead, only the images are created and stored in the result folder.

If **Images** in 3D view are generated, the option **Transparent Background** allows to save the images with transparent background if selected.



The option **Frames Per Second** is available for the MP4 and MKV video formats. Increasing the number of frames per second increases the number of images shown within a second of the video and the video appears smoother.

If the number of frames per second is increased from 25 to 50, the video plays twice as fast. To counteract this and maintain the same duration of the video, the total number of frames must be doubled in the **Video Editor** as described on page [25](#).

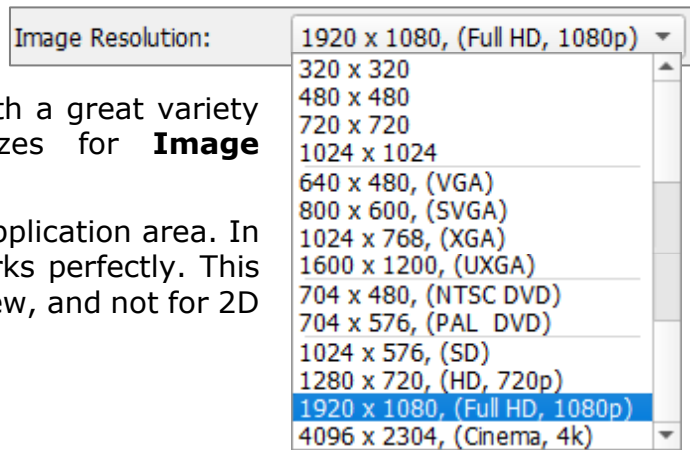


The **Export Video** dialog comes with a great variety of choices for formats and sizes for **Image Resolution**.

Choose the one that best fits your application area. In most cases, the **Full HD** preset works perfectly. This option is only available for the 3D view, and not for 2D view animations.

By default, the single images temporarily rendered to create the video are deleted to save disc space after the video generation has finished. For further video editing and to use them instead of the compressed video, the images may be kept by checking **Keep Images**. For the **Images** video format, the checkbox is grayed out and checked automatically.

Selecting **Unroll as Python** changes the button **Run** to **Save**. Click **Save** to save two **GeoPy** macros with the same name entered for **Result File Name**:




- ***.py**: generates the video using the *_status.py.

Execute this file to generate the video, by selecting **Macro Execute Macro / Script** from the menu bar. In the **Macro Execution Control** browse for the macro and click **Run**, as described in the [GeoPy scripting](#) User Guide.

- ***_status.py**.


Includes the video generation parameters as a large Python macro containing the complete states of **GeoDict** for every rendered frame.

After clicking **Save** the user can decide to open the first macro in the default text editor or not.

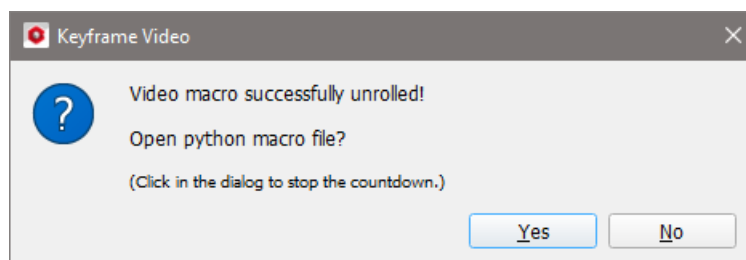


Note, that this creates and saves two Python files but does not render the video. However, this is useful if the video should be tweaked at a specific point or if animations should be added via script. To learn more about how to edit and play back **GeoPy** macros, see the [GeoPy scripting](#) User Guide.

For 2D animations, additionally, the **Legend Placement** may be selected as **Overlay** or **Attached** from the pull-down menu.



If **Overlay** is selected, the legend elements are shown above the 2D slices, while for **Attached** the full slice is visible, as the legends are placed around the image.

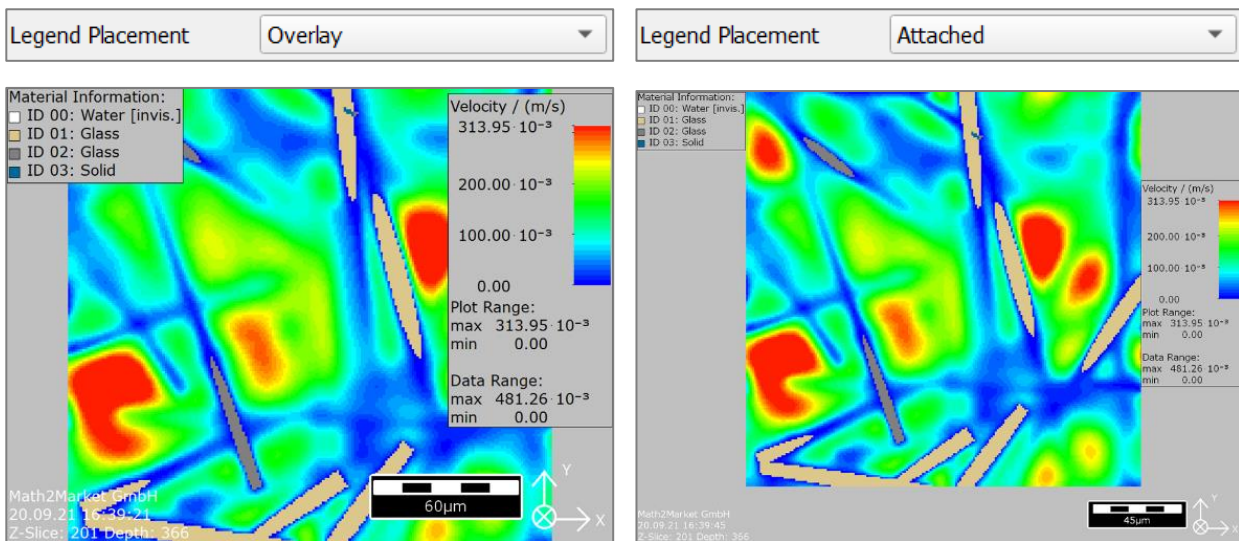

This option is not available for the **(all slices)** presets. For these presets, the legends are placed as overlay by default.

After clicking **Run** in the **Export Video** dialog, the video is generated and saved to the current **GeoDict** project folder. Additionally, a result file (*.gdr) containing information about the video generation is created and placed next to the video file. The structure (*.gdt) is saved in the result folder.

The parameters entered in the **Export Video** dialog may be saved into GPS (GeoDict Project Settings) files and/or loaded from them.

Remember to restore and reset your (or **GeoDict's**) default values through the icons at the bottom of the dialog when needed and/or before every video generation.

Resting the mouse pointer over an icon prompts a ToolTip showing the icon's function to appear.


VIDEO PRESETS

For 2D view and 3D view, several video presets are provided that let the user generate great videos from the loaded microstructure by simply clicking **Generate Video**.

For each of these video presets, a **preview** is shown on the left-side of the panel. Checking or unchecking **Play Previews** at the bottom right of the **Create Video** dialog controls whether the previews should play or stop.

In the middle of the panel, the name and a short description of the video preset are displayed.

The options **Generate Video**, **Open Video Editor**, and **Edit Video Preset** are given for each preset (as mentioned above in page 3) on the right side of the panel.

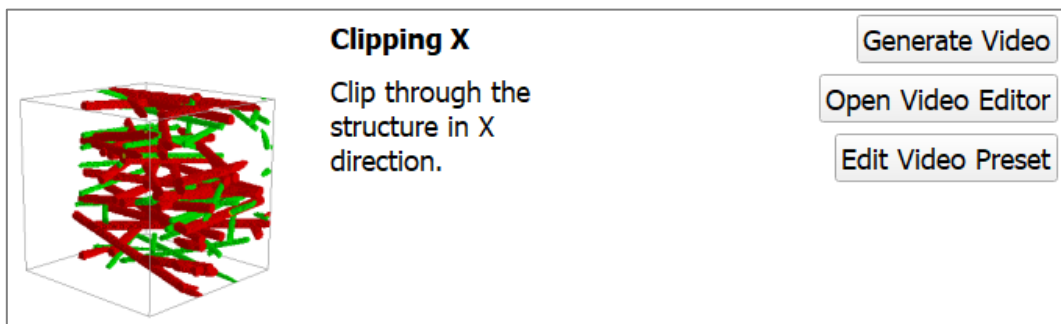


Clicking **Generate Video** opens the **Export Video** dialog. The dialog has a good initial default setup for most videos. Select a **Result File Name** and click **Run** to generate the video. For a more detailed description of this dialog, see page 5. The animations shown in the preview are applied to the current structure displayed in the Visualization area of GeoDict.

Click **Open Video Editor** to open and edit each video preset in the **Video Editor** dialog. A description of how to edit a video with the **Video Editor** is found starting on page 19.

The **Edit Video Preset** dialog opens by clicking the **Edit Video Preset** button. Modify the name, the description, and the **FPS** (frames-per-second) that define the preview playback speed of the selected video preset.

The preset can be removed from the list by clicking **Remove**.

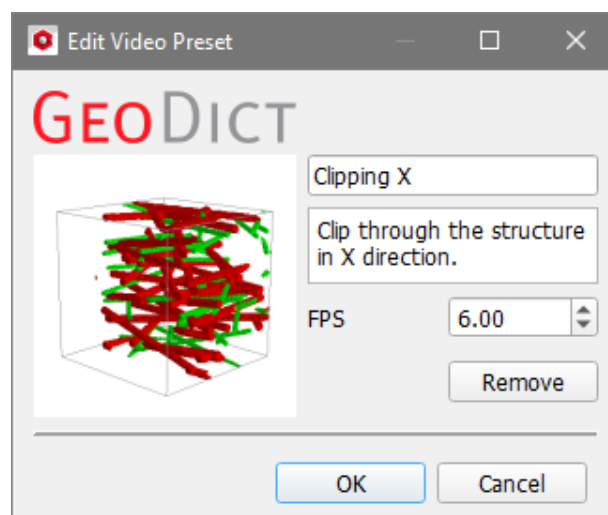


Create Video – Video Presets


Click **OK** to save the new settings for the preset or click **Cancel** to reject the changes and close the dialog.

The video presets **Follow Particle**, **Particle Animation**, **Front To Back (all slices)**, and **Back To Front (all slices)** cannot be edited directly in the **Video Editor** dialog or in the **Edit Video Preset** dialog.

However, the Python scripts corresponding to these video presets can be found in the **GeoDict** settings folder and can be edited with a text editor. Learn how to edit **GeoPy** macros in the [GeoPy scripting](#) handbook of the User Guide.

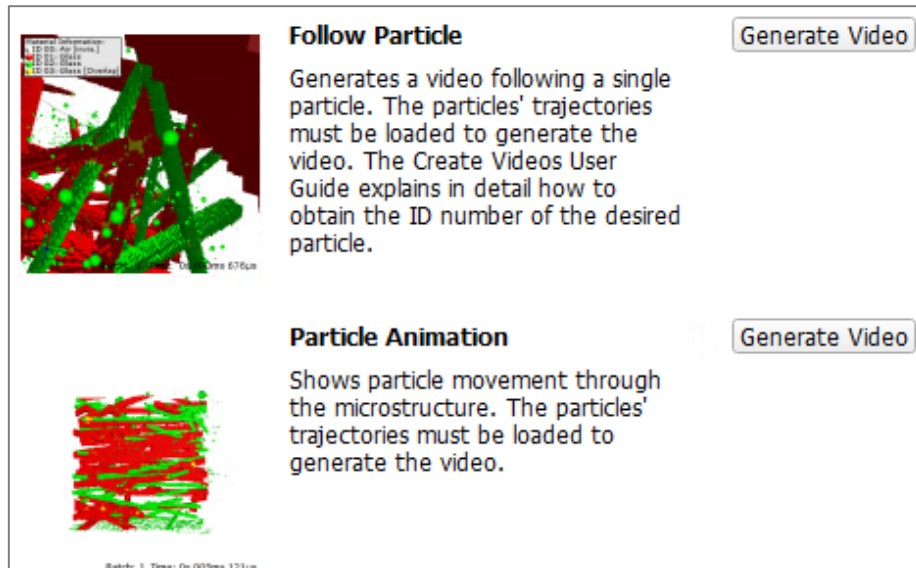


The files corresponding to the other **Video Presets** can be found in the **GeoDict** settings folder, together with the folders containing the images for the preview videos, the GPS (**GeoDict** Project Settings) files, which can be opened in the **Video Editor**, and the files for the previews.

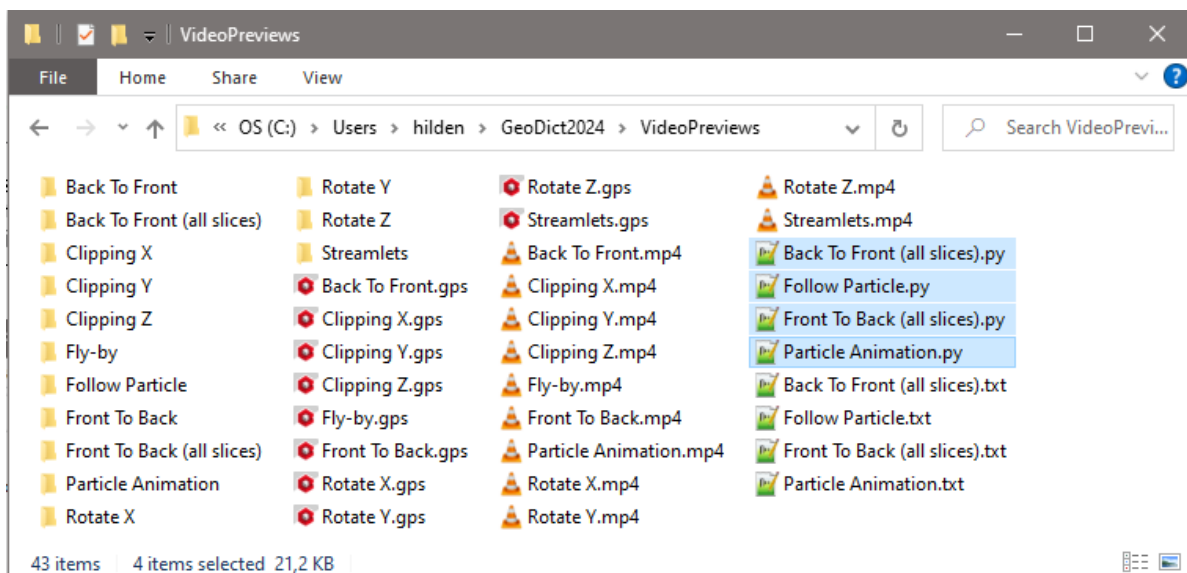


For the **Follow Particle** and the **Particle Animation** video presets, the videos of animated particles are generated only if the microstructure AND the files containing the particles trajectories are loaded in the Visualization area in the GeoDict GUI.


In these two cases, the workflow for the video generation starts with the opening of the **Result Viewer** of the result file (*.gdr) obtained from a **FilterDict** or **AddiDict** simulation.

Then, click the  icon in the toolbar or select **File** → **Open Results (*.gdr)...**

In the **Result Viewer**, first click **Load Structure** to load the microstructure into the Visualization area of GeoDict. Then, under the **Particle Visualization** tab, make sure that **Trajectories** is checked and click **Load Particles** in the **Particles** panel. It is possible to limit the number of batches and particles to be loaded (**Batches**, **Load Every n-th Particle**).

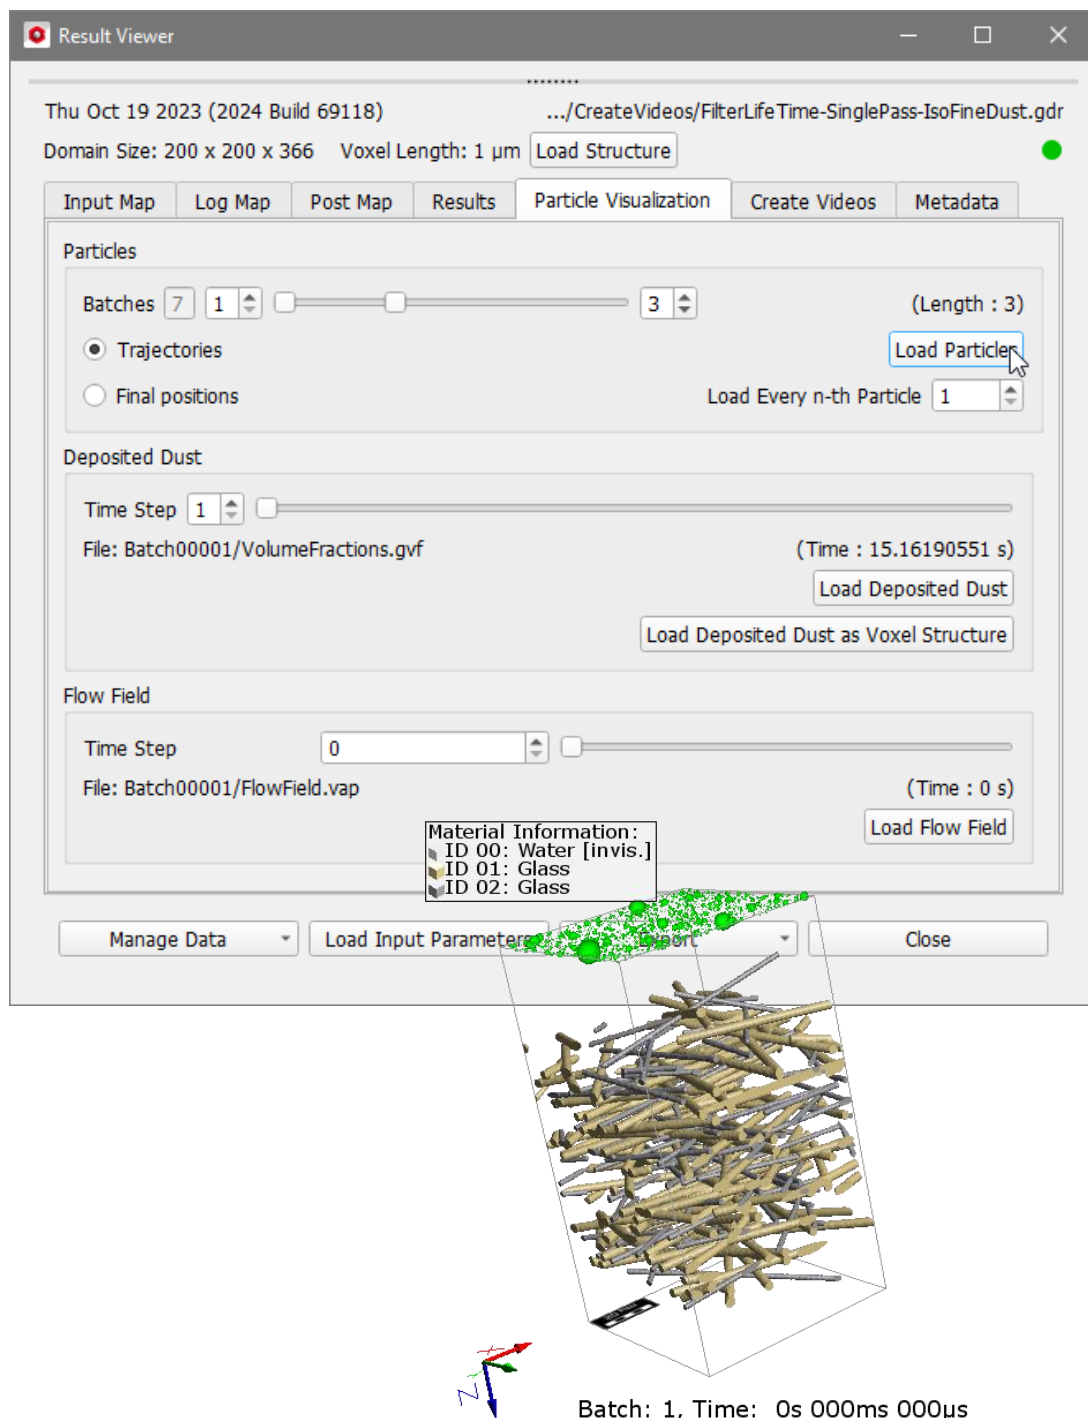


FOLLOW PARTICLE PRESET

Now, click the  icon in the toolbar or select **File** → **Save Video as...** to use the **Follow Particle** video preset.

In the **Create Video** dialog, click the **Generate Video** button for the **Follow Particle** preset video. Adjust the parameters in the **Export Video** dialog as explained [above](#), give the video a name, and click **OK**.

The **Follow Particle** dialog opens, and the following parameters can be specified:


- Enter the number of the desired **Particle Batch**. In our example above, the result file contains results from 8 batches.
- For **Particle to follow**, enter the ID of the particle the camera should follow. How to obtain this ID number is explained directly [below](#).
- **Video Duration** controls the length of the video in seconds. The smaller the number, the faster the particle flies through the structure.
- **Distance to Particle** defines the distance from the camera to the particle. The default distance is fine for most cases if the **Visualization** → **Diameter Factor** in the **Custom Particle Selection** dialog was not changed (see next page). When the particle is large, the user should increase the **Distance to Particle** to avoid having the camera “enter” the particle. The effect in this case is that the particle would appear as a ring instead of a sphere.

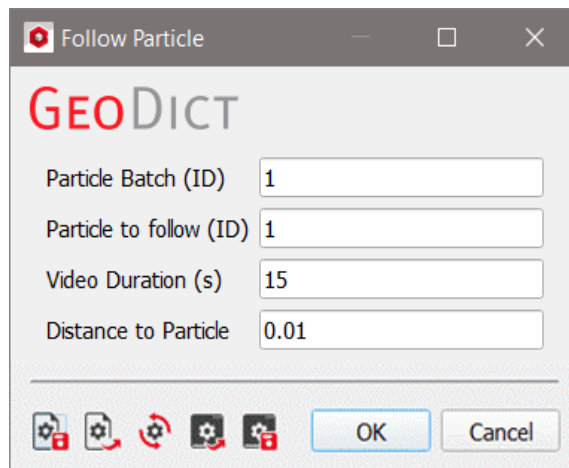


The user may want to create a great video of a single particle moving through the microstructure. This could be a particle that is not filtered but runs from inflow region to the outflow region through a fibrous media. After having loaded the microstructure and the particles, it is possible to locate this individual particle to follow and obtain its ID.

Look at the **Visualization panel** above the **Visualization area** and do the following:


1. In the **Particles** tab, select the number of the **Batch**. This number will be later entered in the **Follow Particle** dialog (see above) as **Particle Batch**.
2. Move the **Time** slider all the way to the right to observe the position of the particles in the outflow region at the end of the batch.

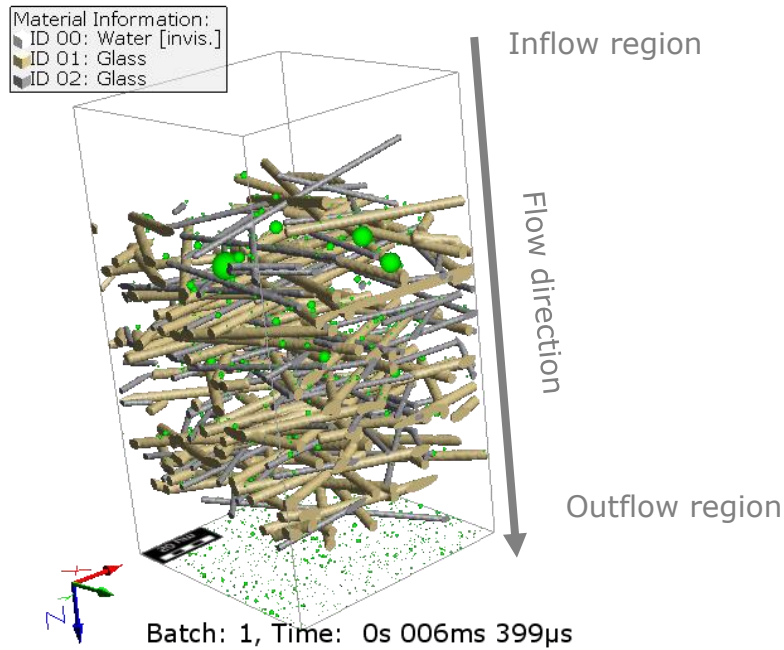

- From the **Particles** pull-down menu, select **Custom** and click **Edit Custom....**



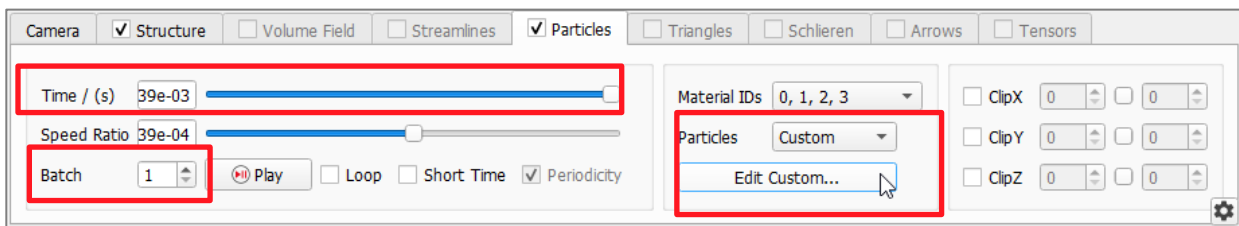


- In the opening dialog, click **Add Selection**. Click the **+** icon to unfold **Selection 1**.

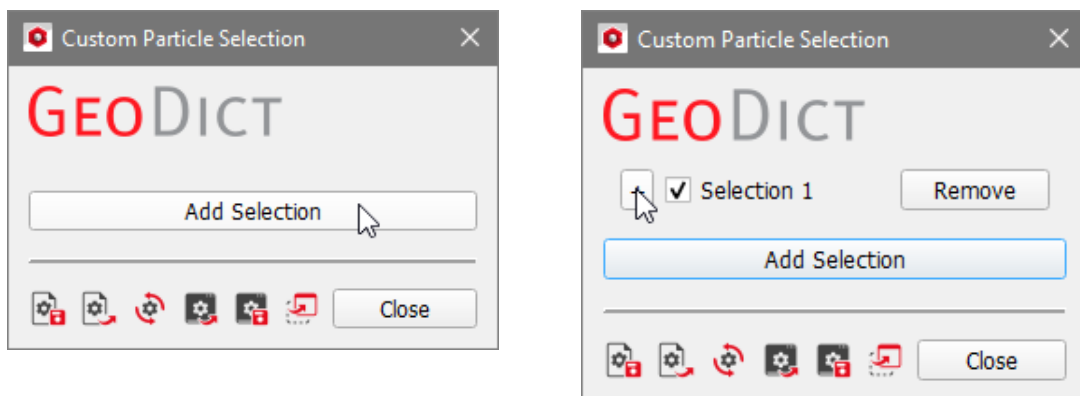

- Check and unfold **ID Selection** and move the slider for **max** to the right until you can see some (good looking) particles in the outflow region, i.e. particles easily visible and around the center on the final position for the batch. Slowly move the slider for **min** (also, directly insert numbers or click the up-arrow) and see how the particles start to disappear.

Visually locate a single particle and adjust both sliders in this way until they show the same ID number and only this single particle can be seen above the microstructure in the Visualization area.

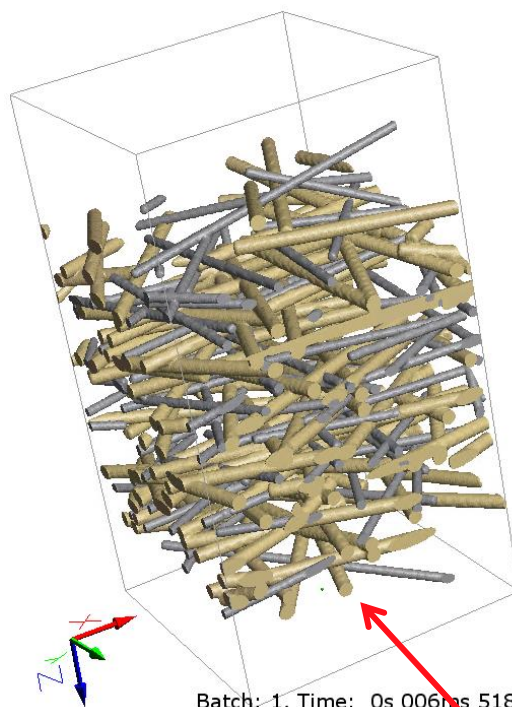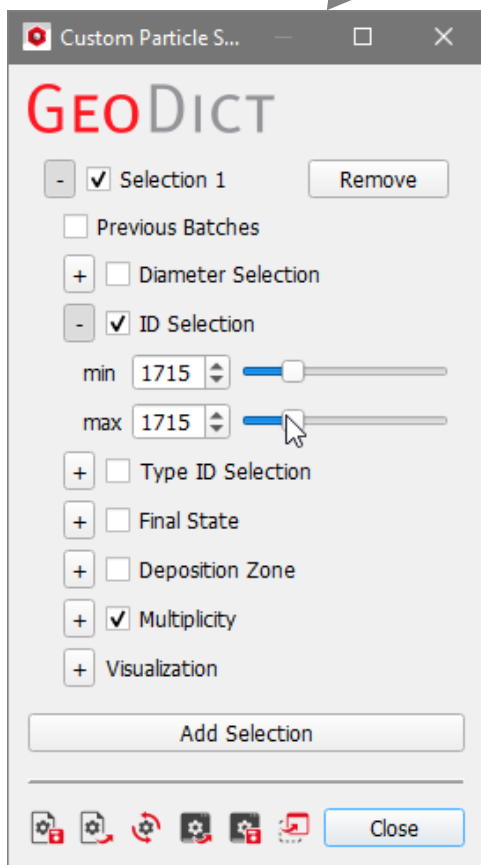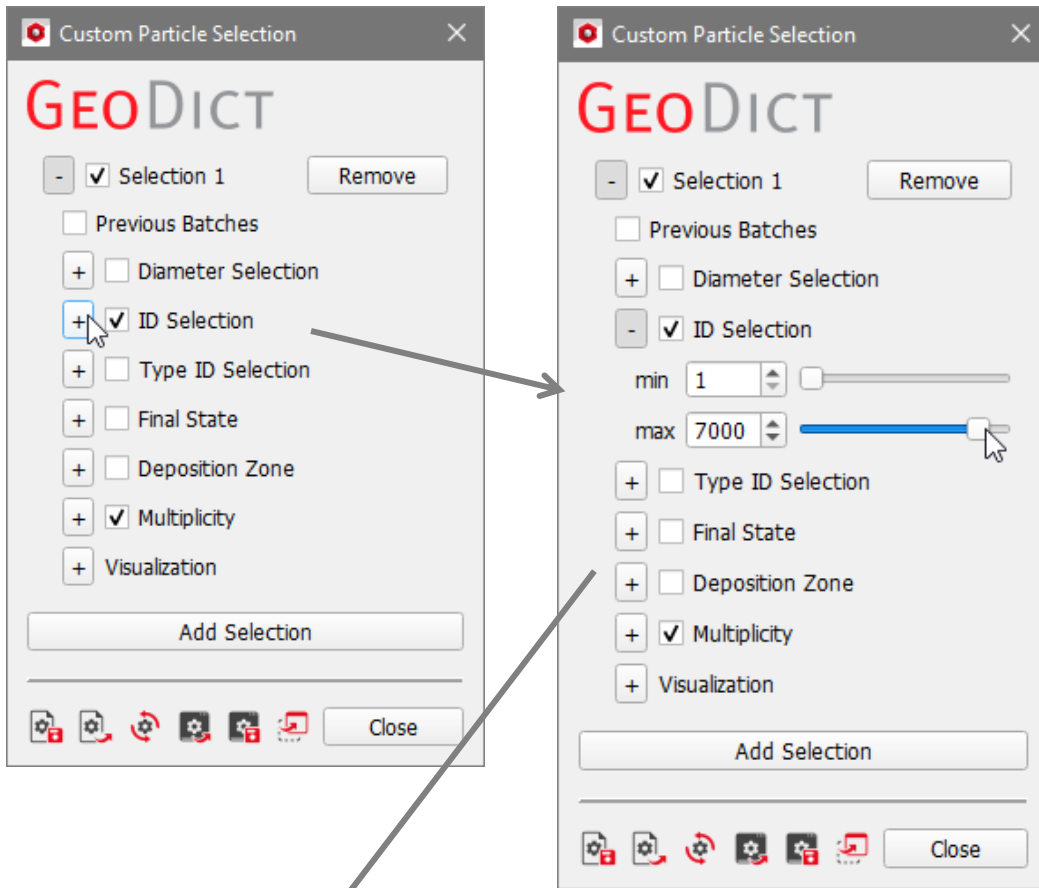

Batch: 1, Time: 0s 006ms 518µs


Particle to follow
(ID number 1715)

Creating videos of GeoDict simulations

If also the other particles, and not only this individual particle, should be visualized in the final video uncheck **ID Selection** before going to the next step (in the Follow Particle dialog).

It is also possible to change the color of the single particle to make it stand out from the others (for more information on how to do this, ask support@math2market.de).


Back in the **Follow Particle** dialog, enter the **Particle Batch** as 1, the ID number of the selected **Particle to Follow** as 1715. Leave the **Video Duration** at 15 s or increase the time for a longer and slower animation. For larger particle sizes increase the **Distance to Particle**, for smaller particles decrease it. For our example the default value generates a good result. After clicking **OK**, the Python script is executed, and the video generated.

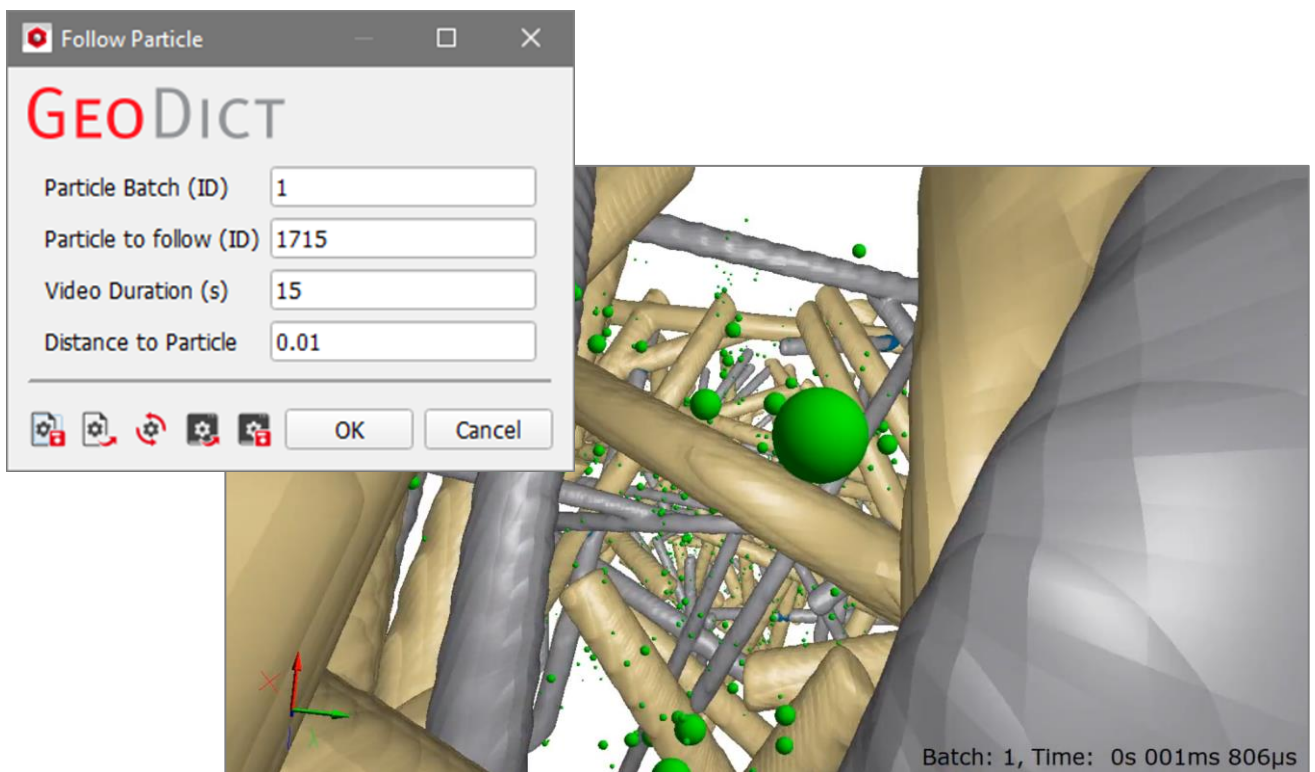

PARTICLE ANIMATION PRESET

Also for the **Particle Animation** video preset, an additional dialog opens after clicking **Run** in the **Export Video** dialog.

In the **Video Generation** dialog, enter the **Seconds Per Batch** defining the time spent on each batch in the video.

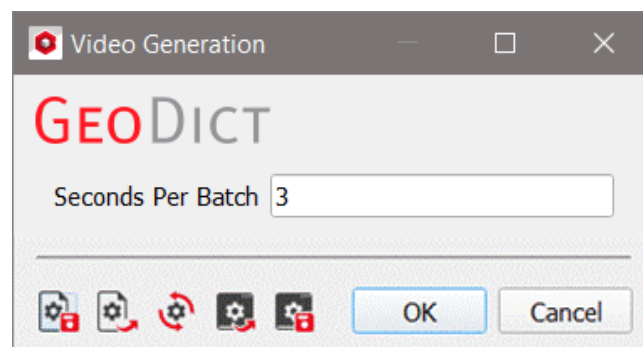


IMPORT AS VIDEO GEOAPP

Via **Import as video GeoApp**, the video presets created and saved by the user are added to the **Create Video** dialog and are displayed with their own preview.

A *.gps (GeoDict Project Settings) file saved from the **Video Editor** (as described in page 20) is imported by clicking the **Import** button for the **Import as Video GeoApp** entry in the **Create Video** Dialog.




Select the saved *.gps file and click **Open**.

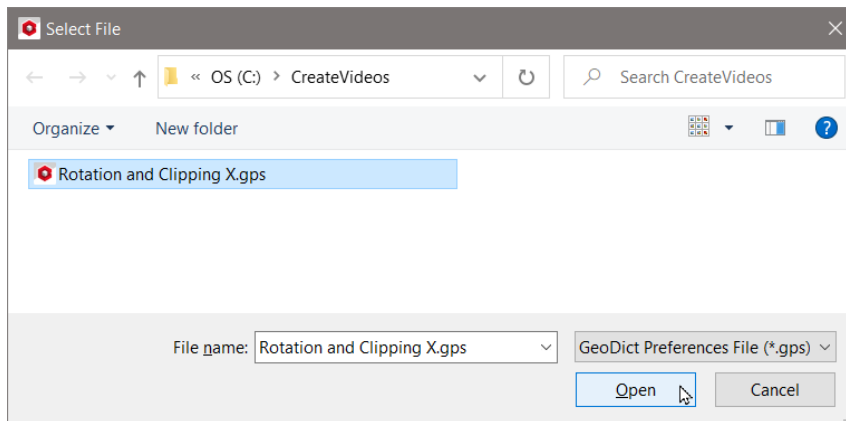

Afterwards, the selected animation is applied to the structure currently loaded to the Visualization area and a folder containing the images, the GPS file, and a *.mp4 file for the preview are saved in the **GeoDict** settings folder.

After the video is created, the new video preset is available in the **Create Video** dialog list with its own preview. It can be modified or removed through the **Edit Video Preset** button and its dialog (see page 8). Here, a GPS file with the name **Rotation and Clipping X** was imported and a description was added via the **Edit Video Preset** dialog.

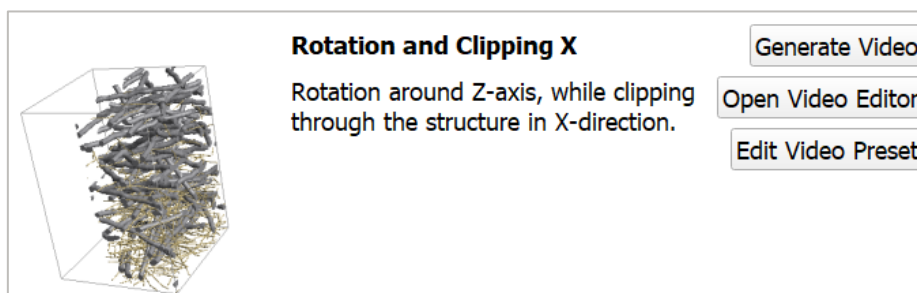


Additionally, the result file and result folder corresponding to the preview video are placed in the **GeoDict** settings folder.

CREATE VIDEO FROM IMAGE STACK

A created stack of single frames is converted into a video using **Create Video from Image Stack**


For example, if a video was generated with the **Keep Images** option checked in the **Create Video** dialog (as described on page 5), creating a video from this image stack is done quickly with the possibility of changing other settings, such as the **Video Format** or the **Frames per Second**. These options are described in detail on page 5.

Scroll to the **Create Video from Image Stack** entry in the **Create Video** dialog and click **Create Video**.

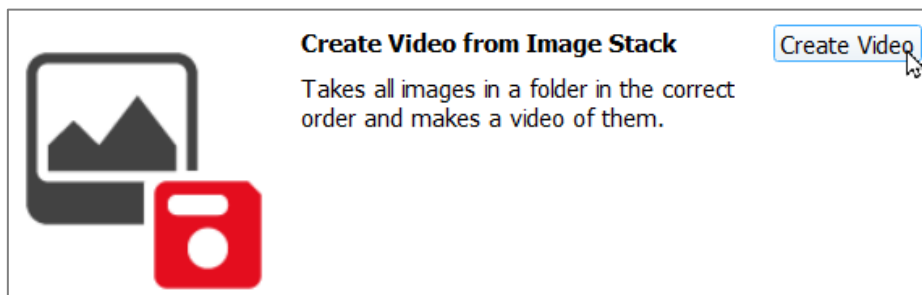

In the opening dialog, choose the **Format** of the video, and click **Browse ...** to search for the folder with the saved individual frames (**Image Stack Folder**). All images found in this folder are used for the video generation.


To control the order in which the images are combined to make the video, make sure that all images have the same name and a running number.

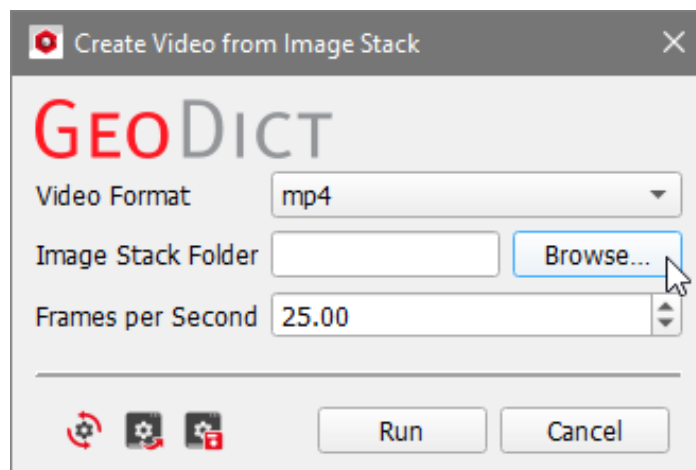

Clicking **Run** opens a dialog to choose filename and destination of the movie. After clicking **Save**, the video is generated and saved to the specified file path.

RESULTS

At the end of the video generation, the following files and folder are automatically saved in the selected project folder:




- A result file. For example GeoDictVideo.gdr, which is the default name.
- A result folder with the same name as the result file (e.g. GeoDictVideo). It contains the structure file (Structure.gdt) and, if **Keep Images** was checked in the **Export Video** dialog, the folder **images** with all video frames as *.png files.
- A video with the same name as the result file and in the selected video format (e.g. GeoDictVideo.mp4)


For detailed information about the **Result Viewer** options, see the [Result Viewer](#) handbook of this User Guide.

After the video is finished, the result file (.gdr) is saved in the project folder and the **Result Viewer** automatically opens.


The **Results - Report** subtab shows the information about the generated video: the name of the video, the video duration, the FPS, the total number of frames, the resolution, and the video file size.

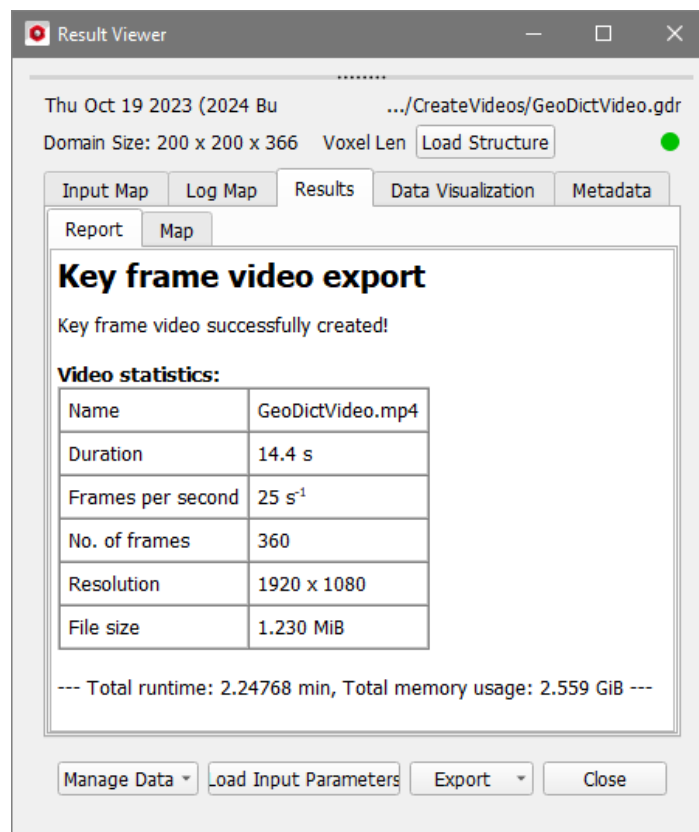

Under the **Data Visualization** tab click **Play Video** and the video is played in the default video player.

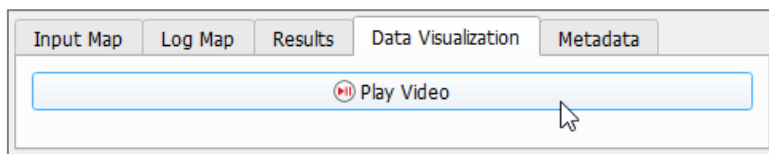

If **Images** was selected for **Video Format** in the **Export Video** dialog, clicking **Open Images Folder** opens the result folder containing the saved images, as no video is generated.

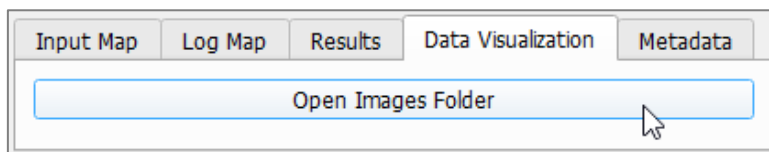

The animation settings used for the video can be loaded in the **Video Editor** by clicking **Load Input Map** in the Result Viewer and opening the Video Editor with **Open Current**, or by dragging the result file to the opened Video Editor and dropping it there.

VIDEO EDITOR


A large variety of possibilities to generate animations for videos is provided by the **Video Editor**. It can be opened in three different ways:

- Clicking **Open Video Editor** to edit any of the video presets (via the Video Editor)
- Clicking **Open Current** to open the animation last edited or used for video generation in the current **GeoDict** session by.
- Clicking **Open Empty** to start with an empty dialog.


The **2D Video Editor** opens from the **2D** tab, and the **3D Video Editor** from the **3D** tab but only the **3D Video Editor** is described here, since the options are the same.

The **Video Editor** uses keyframes to animate a structure or object in a user-defined manner. In the animation, the objects can be made to change position, orientation, size, etc. Most parameters of the visualization in **GeoDict** can be animated in the **Video Editor**, allowing to present structures as desired by the user.

Here, as an example, we modify the video preset Clipping X to describe the Video Editor's options. Click **Open Video Editor** in the **Clipping X** video preset.

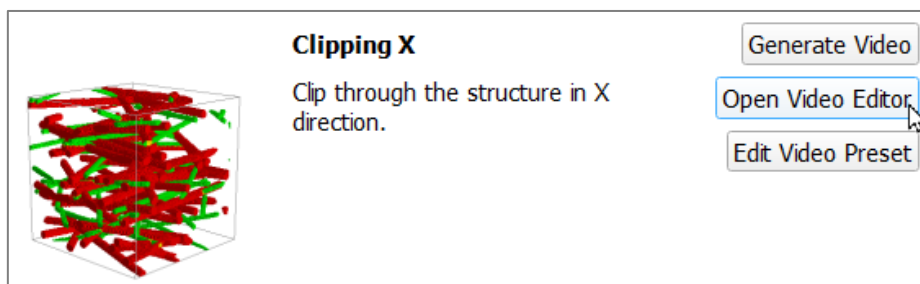

As seen below, the **3D Video Editor** dialog contains the **Properties** field, **Graph** field, **Value** field, and the **Output options**. The **3D Video Editor** dialog opens as a graph-editor that in the middle displays the flow and changes of the video on a 2D-graph (Graph field). The **X-axis** shows the time in frames and seconds and the **Y-axis** shows the values of the chosen parameters.

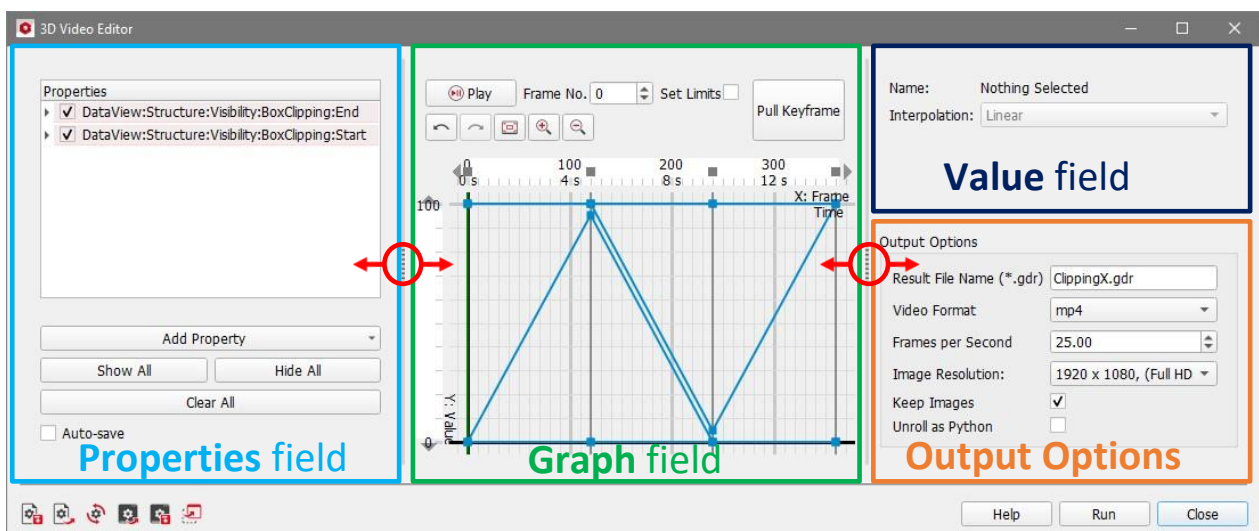

To the left of the Graph field, in the **Properties** field, find the names of the properties corresponding to the plots. These properties are animated over time and displayed in the **Graph** field as curves. The **Properties** field is described in detail in page [21](#).

In the middle of the **Video Editor**, the **Graph** field contains a plot of the properties chosen in the **Properties** field. The curves are described by keyframes and data points, and display the changes of the properties over time. The **Graph** field is explained in more detail starting in page [24](#).

The options to be modified for a selected data point in the graph area are in the **Value** field in the upper right side of the **Video Editor**. They are described in detail on page [29](#).

Right below, find the **Output Options**. These are the same options shown when clicking **Generate Video** in the **Create Video** dialog, which opens the usual **Export Video** dialog that has been explained in detail above (see page [5](#)).

The **Video Editor** fields can be collapsed and expanded by pulling the dotted lines in the left or the right, respectively.

Clicking **Run** starts the video generation. The video, result file, and result folder or Python macros, as defined in the **Output Options**, are placed in the current project folder.

Close the **Video Editor** by clicking **Close**.

The parameters entered in the **Video Editor** dialog can be saved into GPS (**GeoDict** Project Settings) files and/or loaded from them. Remember to restore and reset your (or **GeoDict's**) default values through the icons at the bottom of the dialog when needed and/or before every video generation.

Resting the mouse pointer over an icon prompts a ToolTip showing the icon's function to appear.



PROPERTIES FIELD, GRAPH FIELD, AND VALUE FIELD

Under the menu bar, the **Video Editor** dialog contains the **Properties** field, the **Graph** field, the **Value** field, and the **Output Options**.

The **Output Options** are the same options that appear in the **Export Video** dialog and were already described on page 5.


Before getting into the fields, two definitions are important for comprehensibility:

- **Keyframe** is a frame in time used to indicate the beginning or end of a change made to a property.
- **Data Point** is a representation of a property on a keyframe which holds the current state of the property on the keyframe.

Any video consists of frames and the frames represent specific time values. A **keyframe** stores all visualization values at a specific time. For example, if a structure should be clipped in X-direction, it requires a start keyframe for the beginning of the clipping property and an end keyframe for the finish of the clipping property. The clipping property is then interpolated in the interval between those keyframes.

PROPERTIES FIELD

In the **Properties** field, two properties (in regard the Clipping X video preset) are already displayed by default. If the **Video Editor** dialog was opened by clicking **Open Empty** in the **Create Video** dialog, the **Properties** field is empty, and no plot is displayed in the **Graph** field.

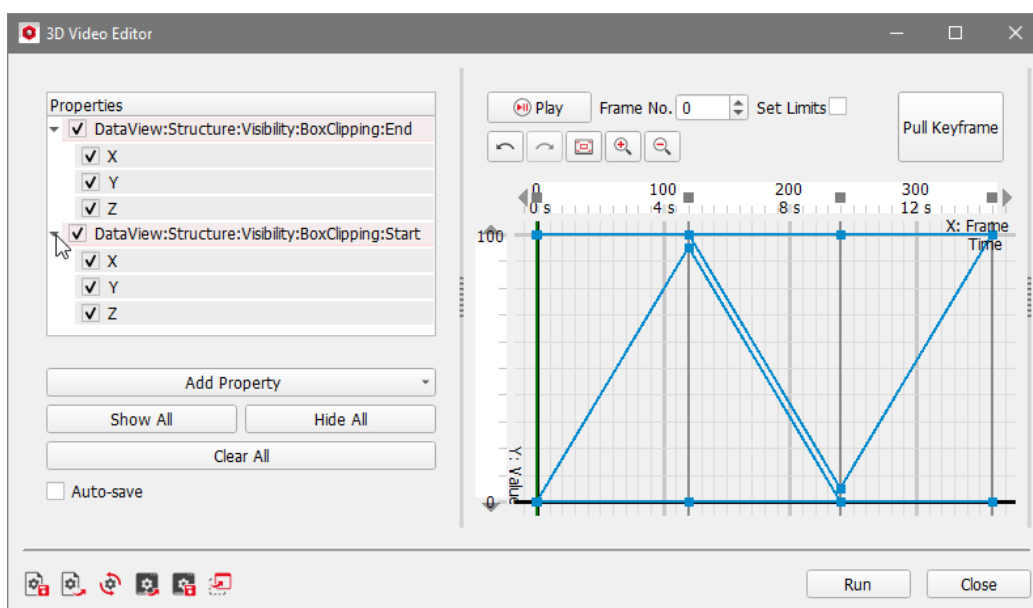

The long names of the **Properties** are also the path of the properties in the **Visualization Settings** panel in the **GeoDict** GUI and in the **GeoPy** script structure.

If **Unroll as Python** was checked in the **Export Video** dialog (described on page 5), the corresponding keys of the property are found in the resulting Python macro. Learn more about the visualization settings in the [Visualization](#) and the [Base Reference](#) handbooks and how to edit and play Python macros back in the [GeoPy scripting](#) handbook.


If the box on the left side of the **Properties**' name is checked, the corresponding curve is visible in the Graph field.

In the example, the **BoxClipping:Start** property defines the clipping in the corresponding directions (X, Y, Z) and the **BoxClipping:End** defines the clipping from the other sides, respectively.


Click the arrow on the left or double click on the property to unfold the **sub-properties**, if they are available. In this example, the different clipping axes are the sub-properties of BoxClipping.

The sub-properties, boxes are also available for checking to show or hide the sub-property in the **Graph** field.

Clicking on a property in the **Properties** field highlights the selected property in the **Graph** field in red, to visualize its change of values over time.

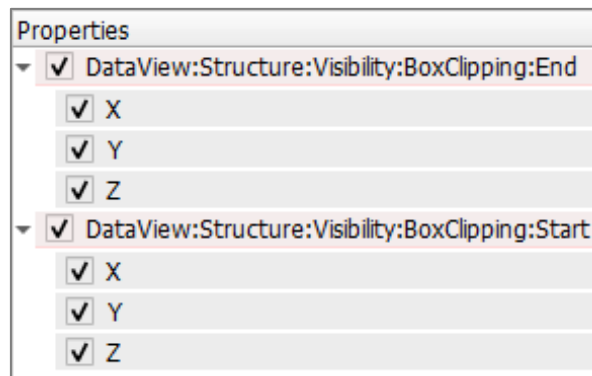


Right-clicking on a property opens a dialog providing the following options:

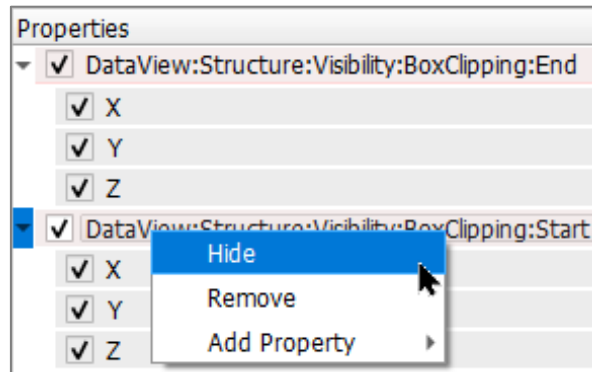

- **Hide (or Show)**: Unchecks (checks) the property and thus, hides (shows) the corresponding graph in the Graph field.
- **Remove**: Removes the property from the Properties field, and thus also from the Graph field.
- **Add Property**: Adds a new property to be changed over time. More information about this option is given [below](#).


At the bottom of the **Properties** field, find the following options:

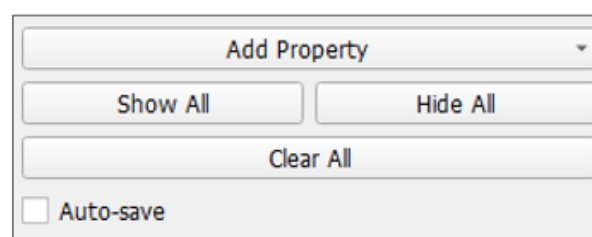

- **Add Property:** Add a new property to be changed over time.
- **Show All:** Selects all properties in the Properties field to be shown in the Graph field.
- **Hide All:** Unchecks all properties in the Properties field, resulting in an empty Graph field.
- **Clear All** clears and deletes all properties along with all keyframes and data points.
- **Auto-save:** Check to save the current settings as start-up settings with each change. Thus, the video settings are not lost after closing GeoDict and can be loaded again by opening the Video Editor with the option Open Current in the next GeoDict session or by clicking the Load Start-up Settings icon in the bottom left of the Video Editor.



For **Add Property**, most of the visualization settings of GeoDict can be selected. They are organized corresponding to the **Visualization Settings** panel, that can be expanded and collapsed, on the right side of the Visualization area of the GeoDict GUI, accessible by clicking on the double arrow at the right. Learn more about these settings in the [GeoDict GUI, Menu and Toolbar Reference](#) and the [Visualization handbook](#).

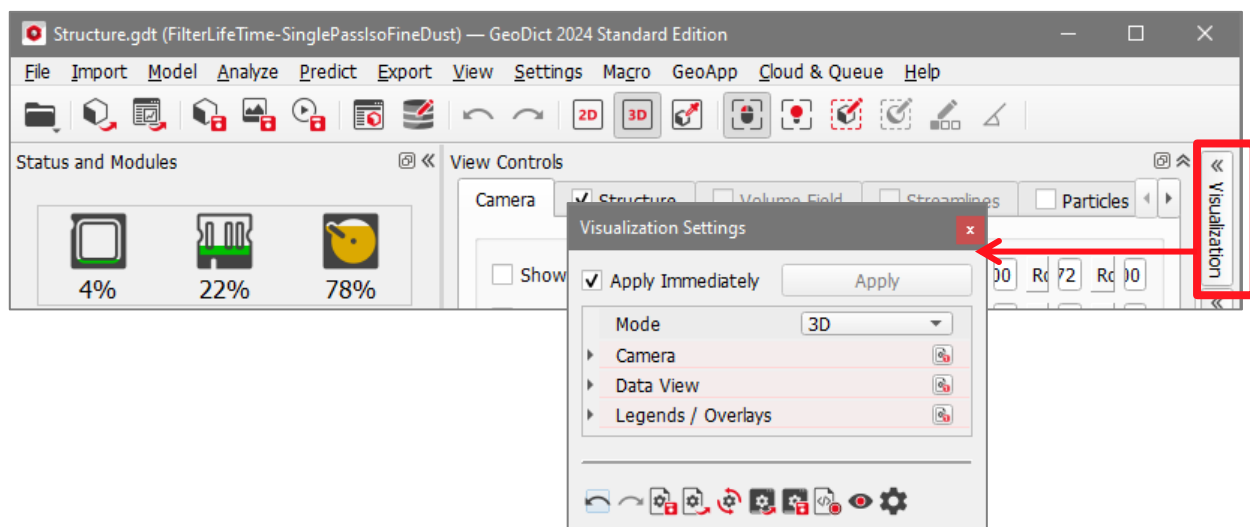


- If working in the **2D Video Editor**, only **Properties** available for **Mode - 2D** can be added to the Video Editor. The other settings are greyed out.
- When using the **3D Video Editor**, only properties available for **Mode - 3D** can be selected.
- Properties available for both visualizations can be chosen for both editors.

The selected property is added to the **Properties** field and can be modified in the **Graph** field. An example for adding and editing a property is given on page [31](#).


GRAPH FIELD

At the top of the **Graph** field, by clicking the **Play** button, the animation defined in the **Graph** field from the first keyframe to the last keyframe is played in the GeoDict Visualization area.

The frame of the animation is displayed in the plot of the **Graph** field by a vertical green line, the **playhead**, that moves along the X-axis. It can be set manually by left clicking on the X-axis in the **Graph** field, or by entering the desired frame number for **Frame No.** above the plot. This also updates the GeoDict's Visualization area. Click **Stop** to end the playing back.

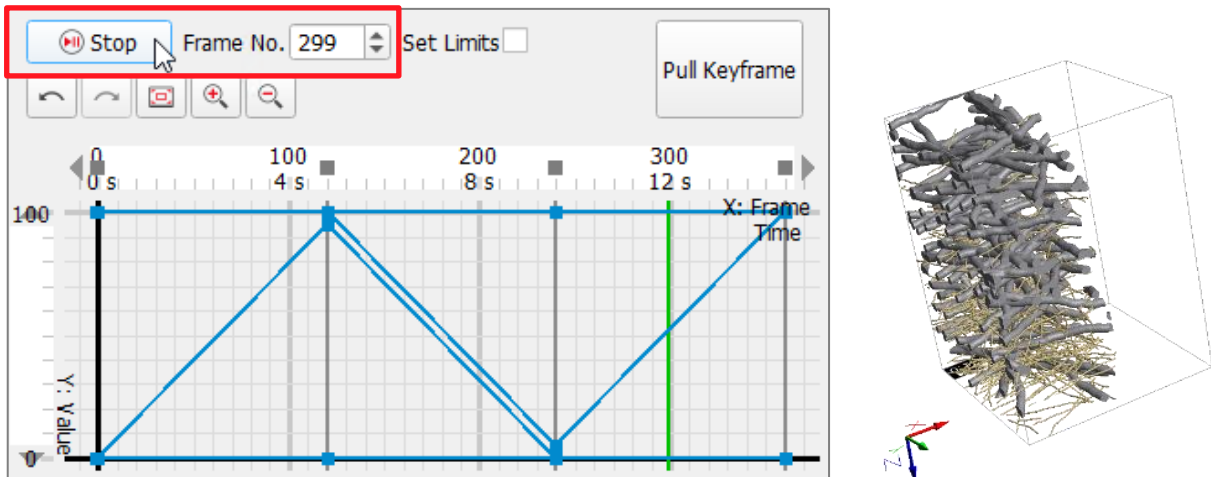

If only a small part of the animation should be played in a loop, check **Set Limits** and enter the desired limits or move the starting arrow (▶) and the end arrow (◀) on the X-axis to the desired positions. In the example below, clicking **Play** will only play the frames 70-150 back.

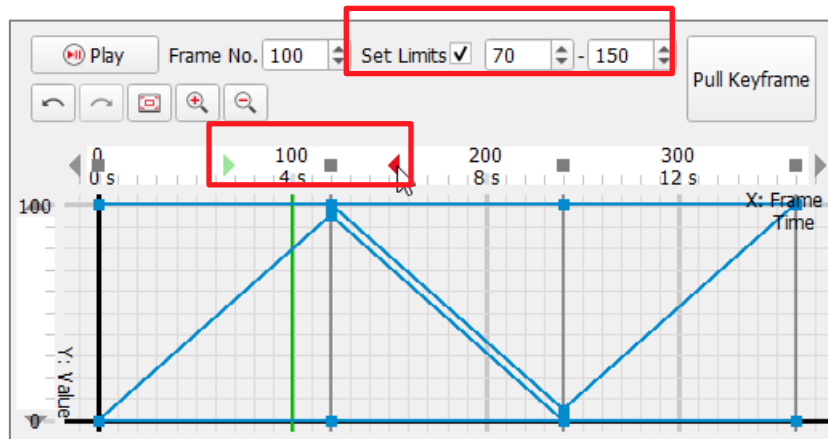

Below the play options, several buttons control the view of the graph as described here:

- **Undo:** Undo an action.
- **Redo:** Redo an undone action.
- **Center View.** Zoom in or out of the plot in the Graph field, resulting in all unhidden curves being in view.
- **Zoom in:** Zoom-in in the plot of the Graph field.
- **Zoom out:** Zoom-out of the plot of the Graph field.



In the **Graph** field, keyframes and data points can be modified, created, deleted, and captured.


Zoom in and **Zoom out** can also be applied using the mouse wheel while the cursor is inside the plot of the **Graph** field. The zoom takes the cursor as its center and zooms in and out of its position in the plot of the **Graph** field.

Right click and move the cursor inside the plot of the **Graph** field to **move around the view**.

If only one axis should be affected, hover the mouse over the value range of the axis and use the mouse wheel to zoom, or the right click to move, just on this axis.

On the X-axis, which represents the time in frames, (in this example) markers can be found at frames 0, 120, 240 and 360. Those markers are **keyframes** and are shown as a small dark gray box on the X-axis and a dark gray line in the plot of the **Graph** field. If the **Video Editor** was opened by clicking **Open Empty**, there are no keyframes to be found.

The button **Pull Keyframe** is found in the upper right corner of the **Graph** field.

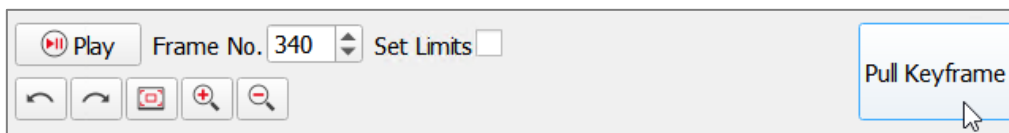


Pull Keyframe reads the current state of the Visualization area in the **GeoDict** GUI and transfers it into the **Graph** field. If a property has changed but is not recorded in the **Properties** field, **GeoDict** gives the user the possibility to add it. The new keyframe is then inserted at the playhead's position. An example of pulling a keyframe from **GeoDict** is given on page [34](#). If no property was changed, still a new keyframe is added at the playhead's position, containing interpolated data points for all properties in this plot section.

Keyframes are groups that contain the data points, represented by small blue or red boxes on the keyframe lines.

A keyframe can be selected by left clicking on the small dark gray box on the X-axis. If the keyframe is selected, this box is marked white. Also, all data points to be found on the selected keyframe are selected automatically.

By left clicking and holding, the user can **change the position** of the keyframe in time. Move the cursor left or right to decrease or increase the number of keyframes used for the last keyframe field. Moving the last keyframe also changes the total number of frames used for the animation.

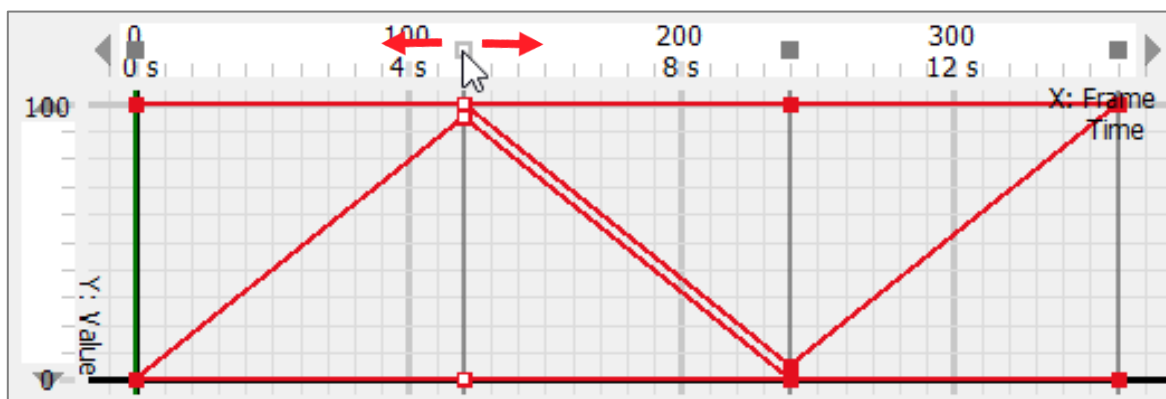

Creating videos of GeoDict simulations

A standard animation runs at a speed of 25 FPS (frames-per-second). Due to this, for example, for an animation that lasts 4 seconds, the properties need to be set over 100 frames.

However, the **Frames per Second** can be changed on the right in the **Output Options** panel. Observe how the time values change in the X-axis of the plot in the **Graph** field for different FPS values.

Frames per Second 10.00




Frames per Second 25.00



Frames per Second 40.00




To remove a keyframe, right-click the keyframe marker on the X-axis to call its options menu and select **Remove Group** to delete it.

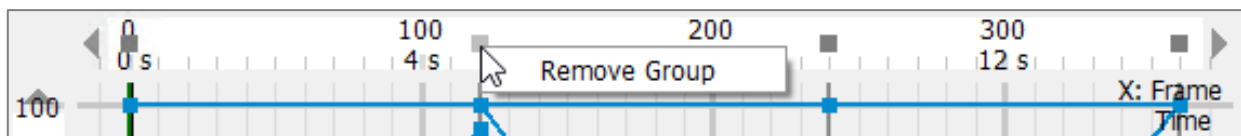

To select a data point of a property on a keyframe, left click on the blue or red box which represents the data point. The selection status of the data point is indicated by displaying a smaller white box inside its box. Also, the data point shows up in the **Value** field with its name, frame, value, and interpolation type.

Multiple data points can be selected by drawing a multiselect rectangle. To do so, click and hold the left mouse button in the **Graph** field and draw a box around the desired data points. All data points within the box are then selected.

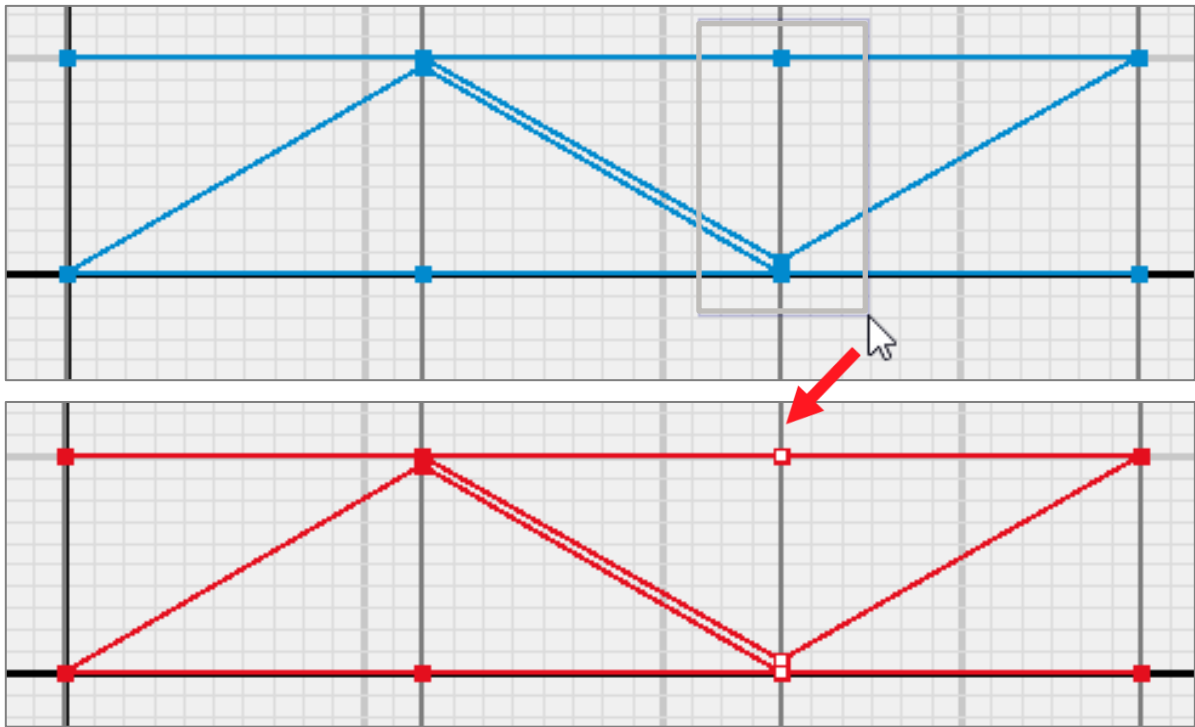


To change the value of a data point, select it and hold down the left mouse button. Then, move the cursor up and down along the keyframe to raise or lower the value or move the mouse left and right to change the timing or frame of a data point. This automatically creates a new keyframe if there is none at the chosen time or attaches it to an existing keyframe.

Alternatively, change **Frame**, **Value**, and **Interpolation** in the **Value** field as described on page [29](#).

Right clicking on a data point offers the following options:

- **Remove Points:** Removes the data point beneath the right click. If multiple data points are selected, all these selected data points are deleted.
- **Remove Property:** Removes the property and all its data points beneath the right click. Multiple selection does not have an effect here.

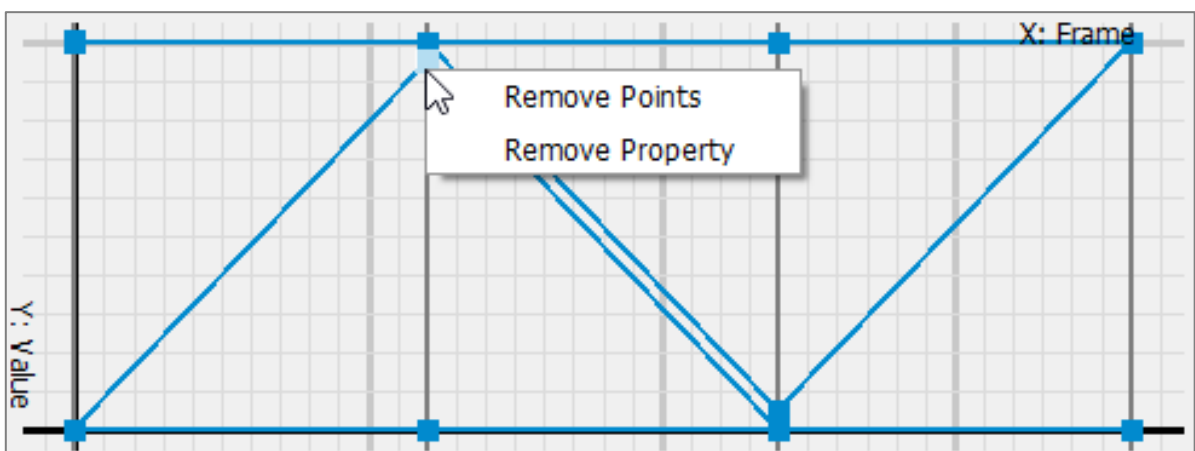


The following options are available by right clicking in the plot of the **Graph** field:

- **Pull Keyframe from GeoDict:** Reads the current state of visualization in the Visualization area of the GeoDict GUI and transfers it into the plot of the **Graph** field. If a property has changed but is not recorded in the **Properties** field,


GeoDict gives the user the possibility to add it. The new keyframe is inserted at the position of the right-click.

- **Interpolate Keyframe:** Adds a keyframe at the mouse position. The new data points of the properties on this keyframe are calculated through interpolation between the data points before and after.
- **Add Property:** Adds a property in the **Properties** field.
- **Interpolate Selected Properties:** Adds a keyframe at the mouse position. The new data points of the selected properties on this keyframe are calculated through interpolation between the data points before and after. This option is only available if one or more properties are selected.
- **Add Point:** Adds a single data point of a selected property. The value of the data point is interpolated. If no keyframe is present at this X-axis frame, a new one is created.

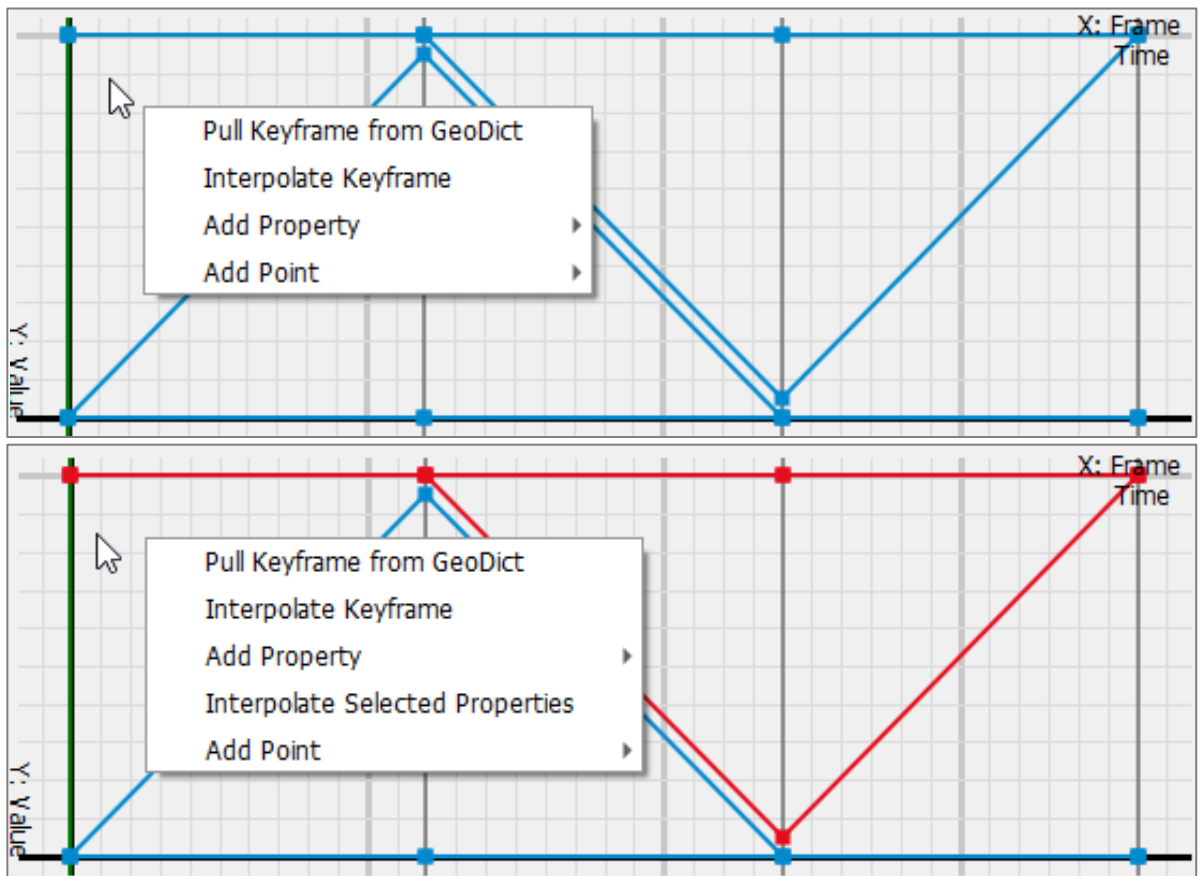


VALUE FIELD

The **Value** field enables the user to enter exact values for keyframes and data points. It distinguishes between selecting a single or multiple data points.

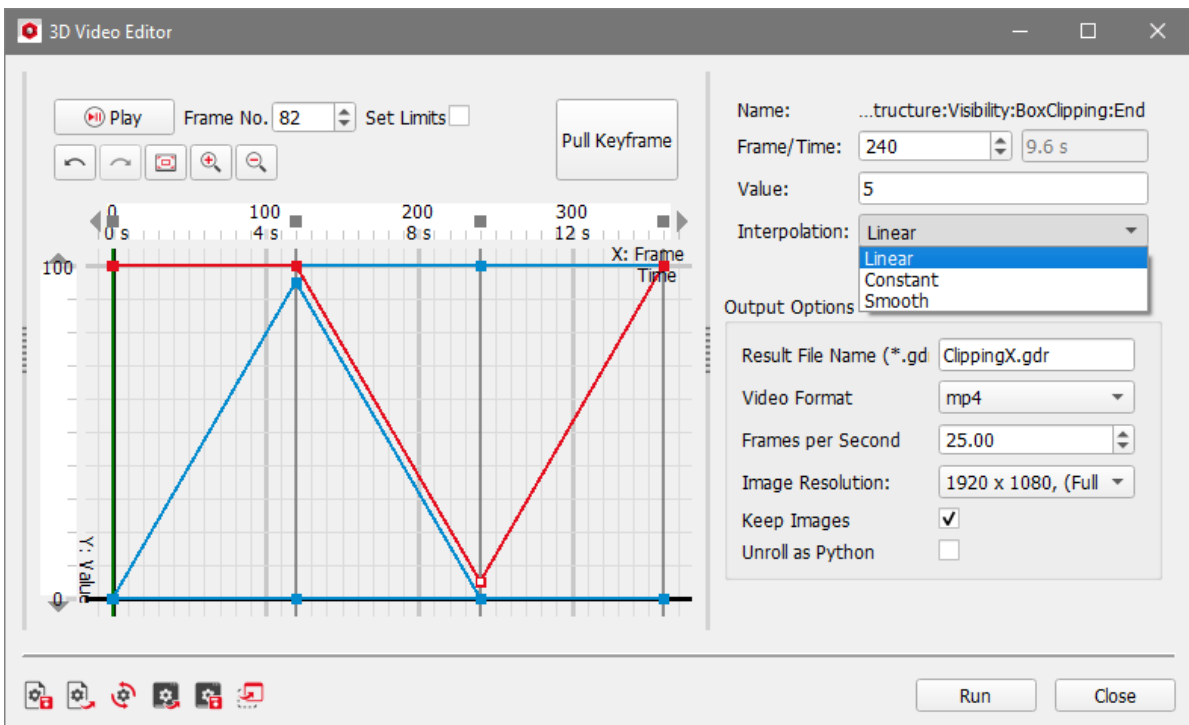

If a single data point is selected, the following options are available in the **Value** field:

- **Name:** The name of the property selected with this data point.
- **Frame/Time:** The frame of the data point on the X- / Time axis can be entered, and the corresponding time is computed automatically, depending on the selected frames per second in the **Output Options**.
- **Value:** The value of the data point on the Y- / Value axis.
- **Interpolation:** The type of interpolation for this data point. The types available for Interpolation are:
 - **Linear:** Linear interpolation of values between the selected data point and the next one.
 - **Constant:** The values of a data point will be constant until a new data point is reached.
 - **Smooth:** The values between the selected and the next data points will be calculated for a smooth transition. Define the left and right **Slopes** of the spline. If both slopes are set to 0, the tangential at the selected points is horizontal. Setting both values to 1 leads to straight lines between the points and thus, is the same as linear interpolation.

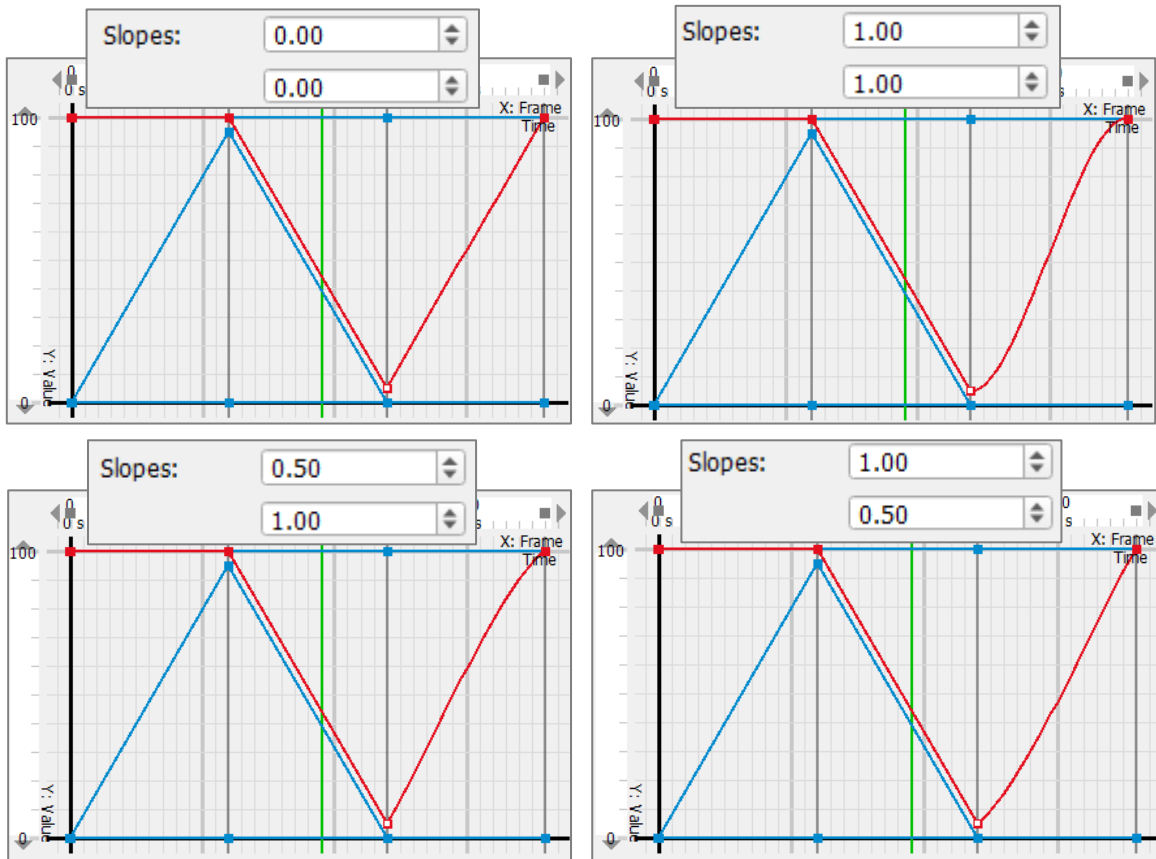


If multiple data points are selected, the **Name** is **Multiple Selected** and the Value field will display different options that can be modified, based on the context of the data points.


Multiple data points on the same Keyframe: If multiple data points have been selected and they all share the same keyframe, **Frame** and **Interpolation** can be changed in the value selection. All data points share the same frame since they share the same keyframe. If **Frame** is changed, all selected data points will be modified. If the data points have the same **Interpolation** applied, the interpolation will show the specific interpolation type. Else, it will show the type **Mixed**. Changing the interpolation type will apply to all selected data points.

Multiple data points on different Keyframes: If multiple data points have been selected on different keyframes only the **Interpolation** type can be changed.


USING THE VIDEO EDITOR – EXAMPLES

With two examples, we show here how to change the video editor settings as desired after loading a structure in 3D.

Load a structure by clicking the  icon in the toolbar or selecting **File** → **Open Structure (*gdt, *gad)...** in the menu bar.

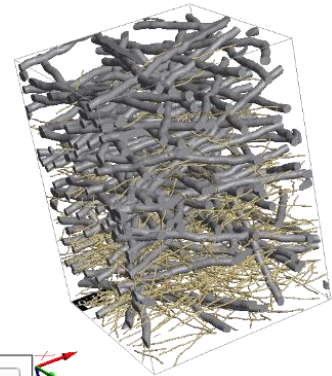

Open the **Create Video** dialog ( or **File** → **Save Video As...**) and choose **Open Video Editor** next to the Clipping X video preset.

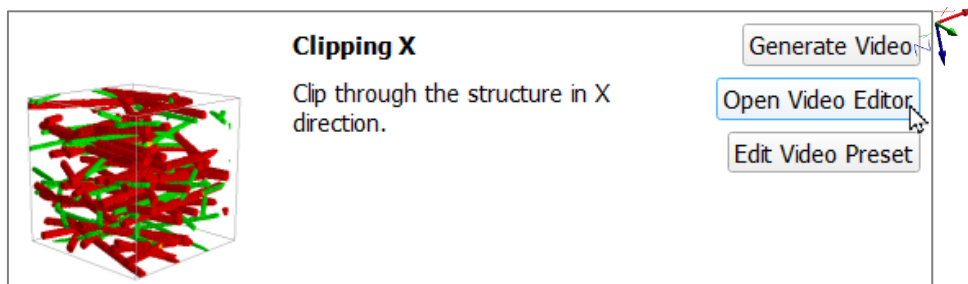


In both examples, additional to the clipping animation, a camera movement around the Z-axis will be added. In the first example, the new property is added via the **Add Property** option and in the second example (page [34](#)) the corresponding keyframe is pulled from GeoDict (**Pull Keyframe**).

HOW TO ADD A PROPERTY

Click **Add Property** in the **Properties** field to add a new property to be changed over time in the **Video Editor** dialog.


Select **Camera** → **Camera 3D** → **Local Rotation**.

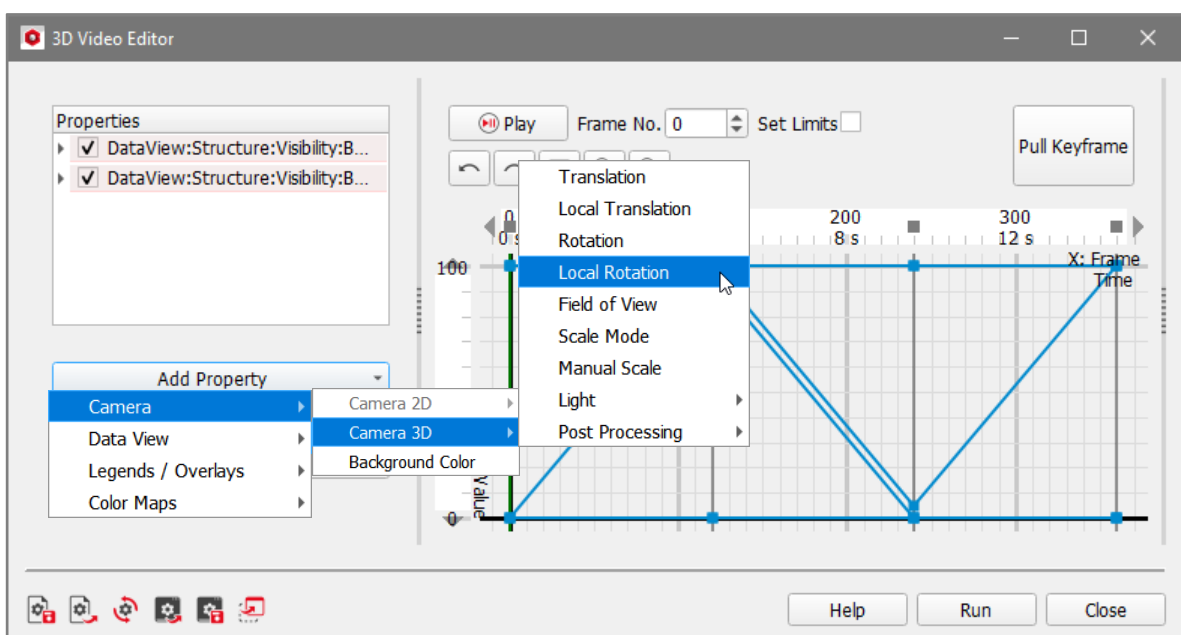


Creating videos of GeoDict simulations

Expand the sub-properties of **Local Rotation** by clicking the arrow on the left or by double clicking on the property name.

Hide all other properties (uncheck **BoxClipping:Start** and **BoxClipping:End**) to only see the plot for **Local Rotation** in the **Graph** field. Right now, this results in an empty plot in the **Graph** field, because there are no keyframes set yet for **Local Rotation**.

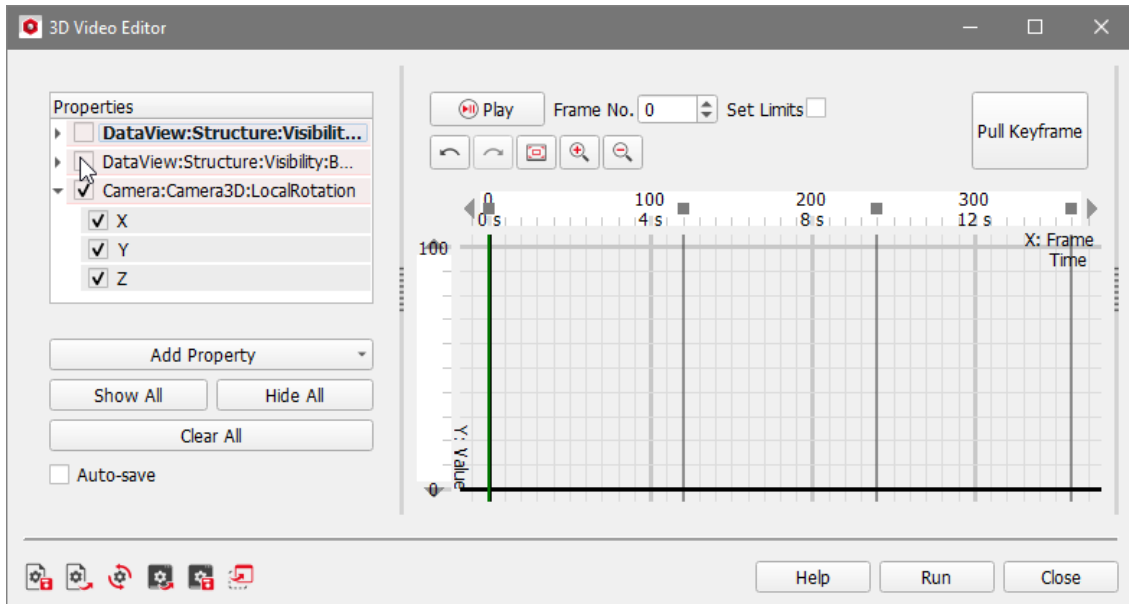


On the first keyframe, at **X-frame 0**, add a new data point for **Local Rotation:Z**, by right-clicking in the plot of the **Graph** field at frame 0. A blue marker appears.

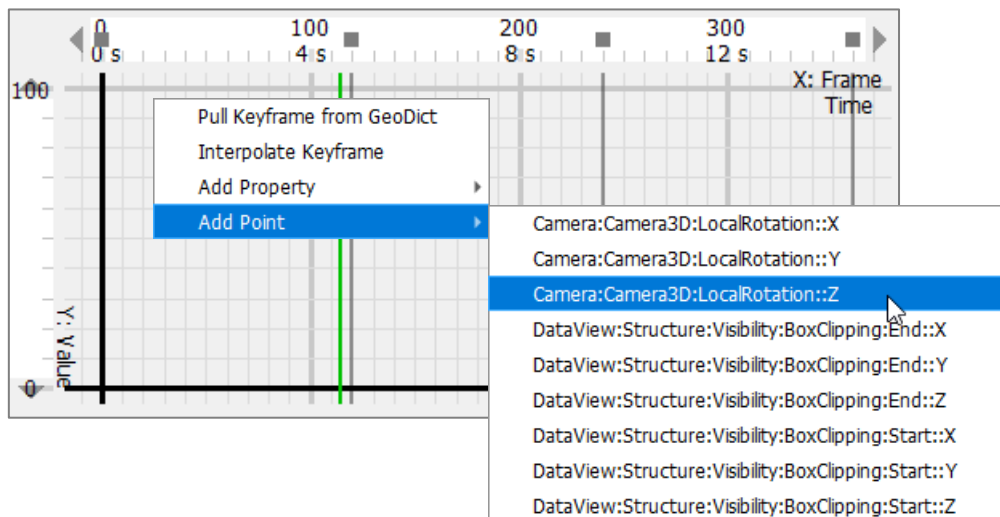







Also do this for the last keyframe, at **X-frame 360**. A blue marker also appears there.

Click on the blue marker at frame 360 to select the data point **Local Rotation Z**. In the **Value** field, change its **Value** to **359**. In this way, a perfect loop will be created.

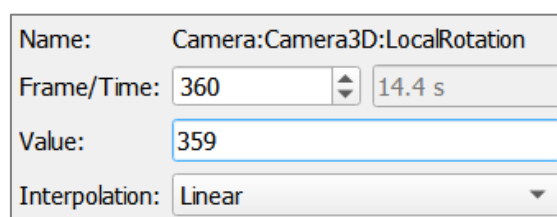

Click on different frames in the plot of the **Graph** field (Frames 100, 200, and 300) and observe different takes of the structure's rotation around its Z-axis while being clipped in the Visualization area of the **GeoDict** GUI. To also follow the graph of the clipping animation, in the **Properties** field check to show the two BoxClipping properties again.

Click **Play** to see the structure in movement in the Visualization area of the **GeoDict** GUI, while the green line of the playhead moves by itself from left to right in the plot of the **Graph** field.

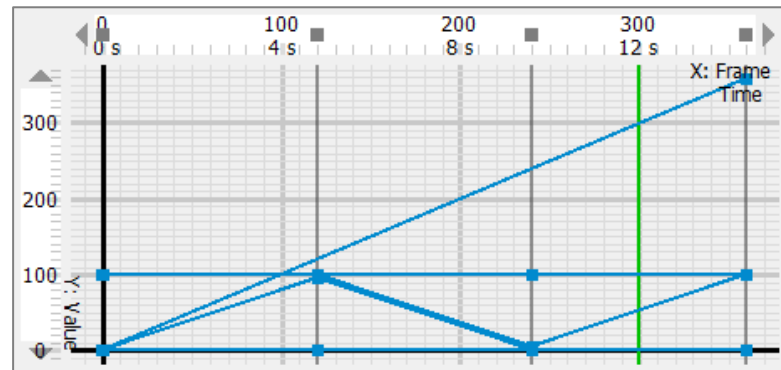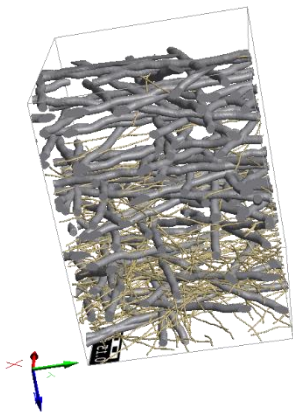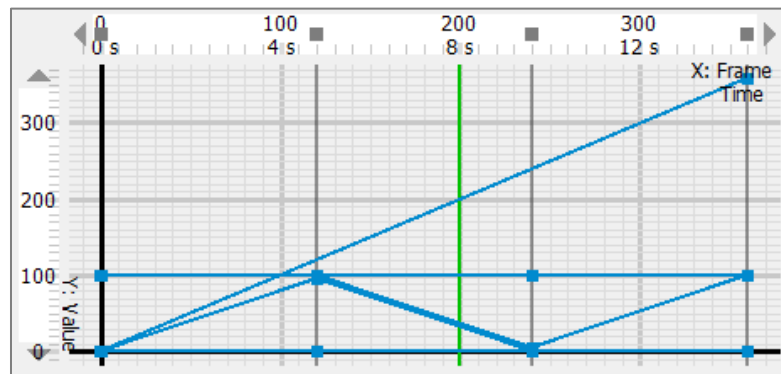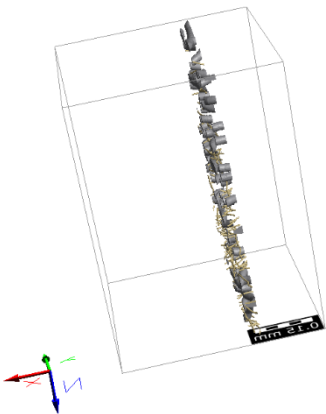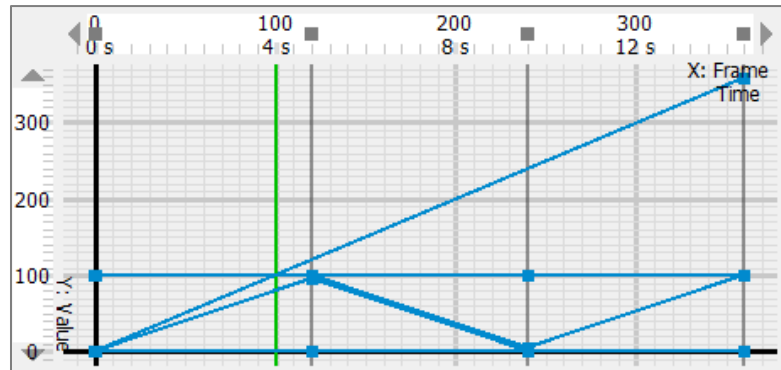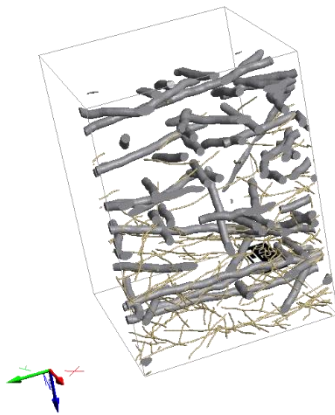


HOW TO PULL A KEYFRAME FROM GEO_DICT

Any properties that are changed in the Visualization area of the GeoDict GUI while the **Video Editor** dialog is open, may be pulled into the plot of the **Graph** field and be part of the final video.


Make sure that a structure is loaded in GeoDict, and the **3D Video Editor** dialog is opened as explained on page 31.

In the GeoDict GUI, click the **Visualization** tab in the sidebar to the right of the Visualization area to unfold the **Visualization Settings**.

Unfold the settings for **Camera** and then, **Camera 3D**. For **Local Rotation Z**, enter **359**.

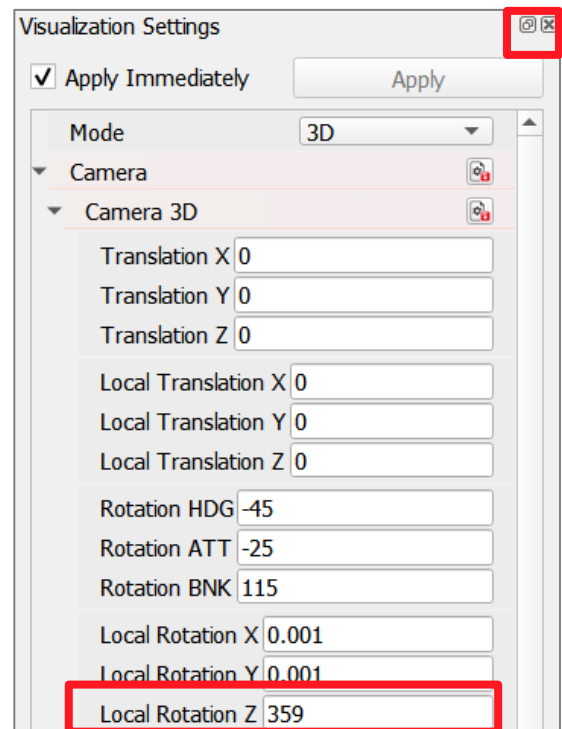


In the **3D Video Editor** dialog, click **Pull Keyframe**.



In the opening dialog, select **Local Rotation** and click **OK**.


The new property appears in the **Properties** field and in the plot of the **Graph** field.

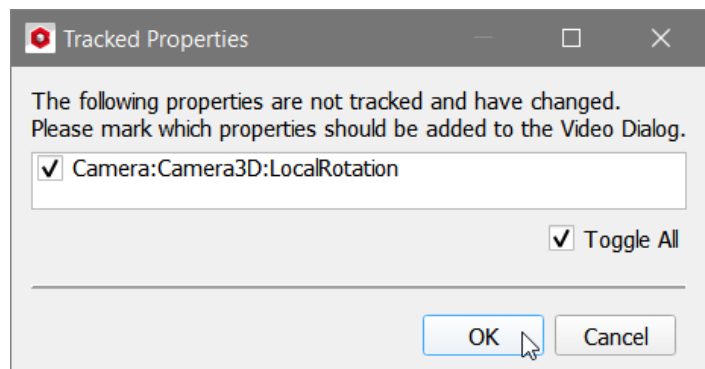

If the playhead (green line) in the plot of the **Graph** field is not placed upon an existing keyframe, a **new keyframe** is added at the playhead's position. The plot for the **new property** is added in the keyframe field between the last keyframe before and the playhead's position.


Here, the playhead was located at frame 360, which was the last keyframe from the clipping animation. No new keyframe had to be added and the keyframe before (frame 240) was used as a start keyframe for the new animation.

Here the **Local Rotation** property appears as a red line because the property is selected in the **Properties** field. To apply the animation to the complete movie, the frames of the two **data points** of the **Local Rotation** property need to be changed.

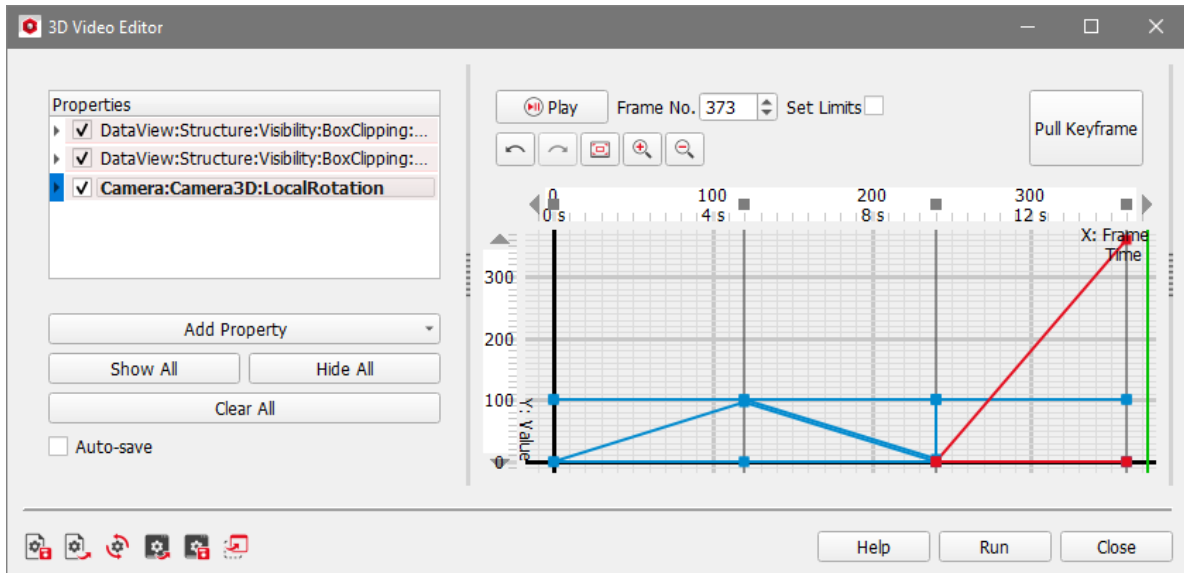

First, in the **Properties** field, hide all other properties to only see the plot for **Local Rotation** in the plot of the **Graph** field. Uncheck **BoxClipping:Start** and **BoxClipping:End**. Unfold the sub-properties for **Local Rotation** by clicking the triangle on the left, and also hide the sub-properties **X** and **Y**.

Expand the **Value** field. In the plot of the **Graph** field, select the first data point (with value 0) by clicking on it and enter **0** for **Frame** in the **Value** field. In the same way, change the **Frame** of the second data point (with value 359) to **360**.

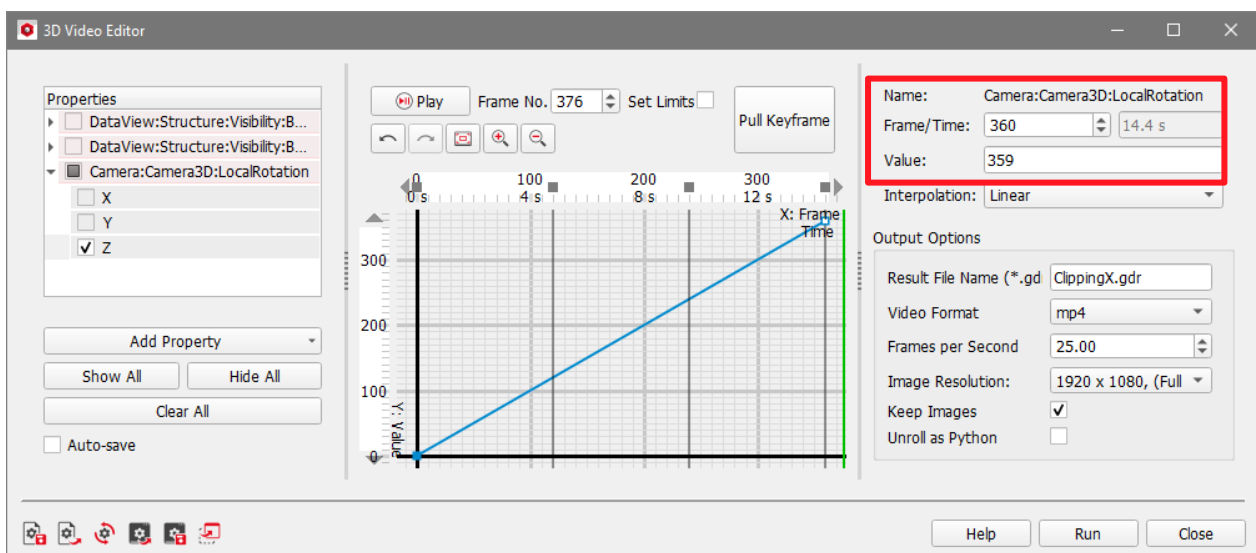

Observe the structure's rotation around its Z-axis in the Visualization area of the **GeoDict** GUI while clicking on different frames in the plot of the **Graph** field.

Preview the animation in the Visualization area of the **GeoDict** GUI by clicking **Play** in the upper part of the **Graph** field.

Technical
documentation:

Janine Hilden
Barbara Planas

MATH
2 MARKET

Math2Market GmbH
Richard-Wagner-Str. 1, 67655 Kaiserslautern, Germany
www.geodict.com